MV-ACU3-CMs(WP)-AM-ST

Standard USB3.0 Type-C Data Cable (Waterproof)



MV-ACU3-CMs(WP)-AM-ST Standard USB3.0 Type-C Data Cable (Waterproof) can be used for data transmission and power supply of USB3.0 interface cameras, and is available in a variety of lengths.


Applicable Product

Hikrobot CT Series USB3.0 Type-C Area Scan Cameras

Available Model

- 0.5 m length: MV-ACU3-CMs(WP)-AM-ST-0.5m
- 1 m length: MV-ACU3-CMs(WP)-AM-ST-1m
- 2 m length: MV-ACU3-CMs(WP)-AM-ST-2m
- 3 m length: MV-ACU3-CMs(WP)-AM-ST-3m
- 5 m length: MV-ACU3-CMs(WP)-AM-ST-5m

Dimension

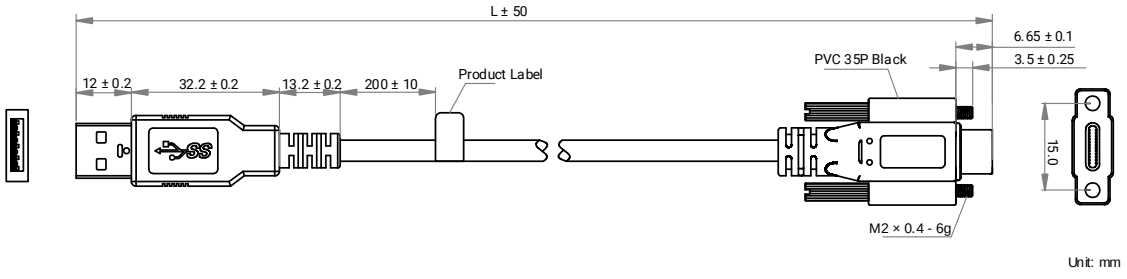

Specification

Model / Parameter	MV-ACU3-CMs(WP)-AM-ST
	Standard USB3.0 Type-C Data Cable (Waterproof)
Physical specifications	
End A connector	Type-C male, screw locking
End B connector	A male
Cable diameter	6.8 mm
Length	0.5/1/2/3/5 m
Cable mechanical	(25AWG*1P+AD)*2C+26AWG*1P+20AWG*2C
Jacket	PVC
Cable color	Black
Connector durability	>750 mating cycles
Min. bending radius	82 mm
Applicable scenario	Static scenes
Electrical features	
Max. voltage	5 VDC
Mechanical	
Ingress protection	IP67 (when connected to camera)
Additional information	
Working temperature	–20 °C to 80 °C (–4 °F to 176 °F)
Certification	RoHS, UL
Packaging	Individual package

Note: Read the camera user manual before connecting the cable to the camera.

© Hangzhou Hikrobot Co., Ltd. All Rights Reserved.
Hangzhou Hikrobot does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.