MV-ACU3-CMs-AM-SF

Super-Flex AOC USB3.0 Type-C Data Cable



MV-ACU3-CMs-AM-SF Super-Flex AOC USB3.0 Type-C Data Cable can be used for data transmission and power supply of USB3.0 interface cameras, and is available in a variety of lengths.


Applicable Product

Hikrobot CT Series USB3.0 Type-C Area Scan Cameras

Available Model

- 3 m length: MV-ACU3-CMs-AM-SF-3m
- 5 m length: MV-ACU3-CMs-AM-SF-5m
- 7 m length: MV-ACU3-CMs-AM-SF-7m
- 10 m length: MV-ACU3-CMs-AM-SF-10m
- 15 m length: MV-ACU3-CMs-AM-SF-15m
- 20 m length: MV-ACU3-CMs-AM-SF-20m

Dimension

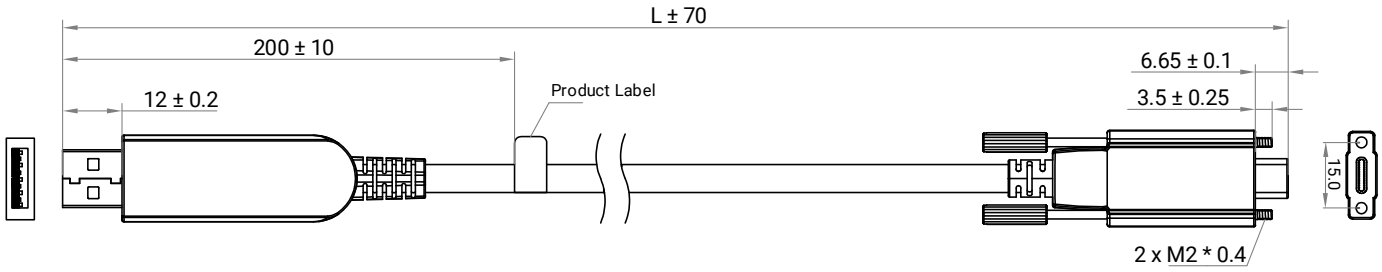

Unit: mm

Specification

Parameter \ Model	MV-ACU3-CMs-AM-SF
	Super-Flex AOC USB3.0 Type-C Data Cable
Physical specifications	
End A connector	Type-C male, screw locking
End B connector	A male
Cable diameter	4.8 mm
Length	3/5/7/10/15/20 m
Cable mechanical	AOC-Hybrid-U-2A1b+6*24AWG+B
Jacket	TPU
Cable color	Black
Connector durability	5,000 mating cycles
Min. bending radius	57.6 mm
Applicable scenario	Static scenes / drag chains
Max. U-type bending cycles	10 million times
Electrical features	
Max. voltage	5 VDC
Additional information	
Working temperature	–10 °C to 50 °C (14 °F to 122 °F)
Certification	RoHS
Packaging	Individual package

Note: Read the camera user manual before connecting the cable to the camera.

Hangzhou Hikrobot Co. Ltd.
en.hikrobotics.com

© Hangzhou Hikrobot Co., Ltd. All Rights Reserved.
Hangzhou Hikrobot does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.