

MV-LLDS-H

Standard Bar Light

MV-LLDS-H series standard bar light adopts high-quality LEDs to provide stable and sufficient lighting, which is available in models with various length sizes with flexible installation.



Key Features

- The irradiation direction and angle can be adjusted freely.
- Supports multi-side installation.
- Features high-quality LED particles, stable lighting, and high brightness.

Applicable Industry

Character recognition, identification detection of electronic components, edge defect detection, connector pin detection.

Naming Rule

MV - LLDS - H - 50 - 30 - *

LLDS: standard bar light


H: Hikrobot style series

50 - 30: emitting area dimension (mm)


*****: color

Relative Radiation Illuminance


Curve Under White Light

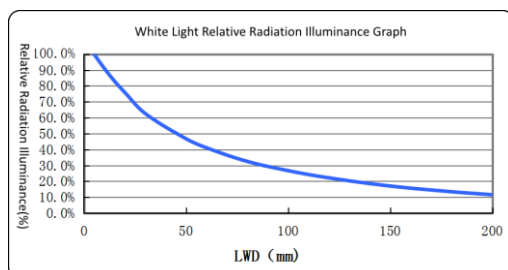

Uniformity Diagram

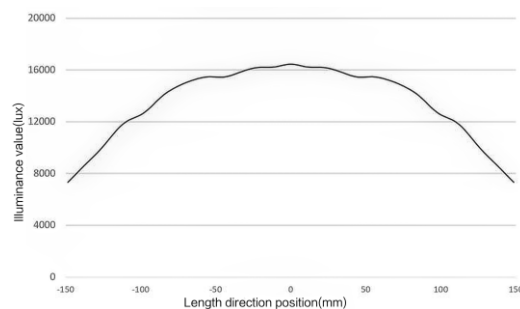

Lighting



Specification

Parameter Model	Performance			Mechanical				Electrical feature			Irradiation	
	Color	Center illuminance/irradiance	Best working distance	Dimension	Emitting area dimension	LED rows	Weight	Power	Input voltage	Connector type	Safety class	Safety distance
MV-LLDS-H-50-30-W	White	≥ 6500 lux @ 100 mm	30 mm to 500 mm	63 mm × 30 mm × 30 mm	51 mm × 21.6 mm	4	0.12 kg	3.4 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-50-30-R	Red	≥ 5000 lux @ 100 mm	30 mm to 500 mm	63 mm × 30 mm × 30 mm	51 mm × 21.6 mm	4	0.12 kg	1.9 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-50-30-B	Blue	≥ 3000 lux @ 100 mm	30 mm to 500 mm	63 mm × 30 mm × 30 mm	51 mm × 21.6 mm	4	0.12 kg	2.6 W	24 VDC	SMR-03V-B	RG2	0.70 m
MV-LLDS-H-50-30-IR850	IR850	≥ 2260 μW/cm² @ 100 mm	30 mm to 500 mm	63 mm × 30 mm × 30 mm	51 mm × 21.6 mm	4	0.12 kg	2.9 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-50-30-IR940	IR940	≥ 2800 μW/cm² @ 100 mm	30 mm to 500 mm	63 mm × 30 mm × 30 mm	51 mm × 21.6 mm	4	0.12 kg	2.9 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-50-40-W	White	≥ 10000 lux @ 100 mm	30 mm to 500 mm	63 mm × 40 mm × 30 mm	51 mm × 31.6 mm	6	0.15 kg	5.3 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-50-40-R	Red	≥ 6500 lux @ 100 mm	30 mm to 500 mm	63 mm × 40 mm × 30 mm	51 mm × 31.6 mm	6	0.15 kg	2.9 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-50-40-B	Blue	≥ 4800 lux @ 100 mm	30 mm to 500 mm	63 mm × 40 mm × 30 mm	51 mm × 31.6 mm	6	0.15 kg	3.6 W	24 VDC	SMR-03V-B	RG2	0.70 m
MV-LLDS-H-50-40-IR850	IR850	≥ 4300 μW/cm² @ 100 mm	30 mm to 500 mm	63 mm × 40 mm × 30 mm	51 mm × 31.6 mm	6	0.15 kg	4.3 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-50-40-IR940	IR940	≥ 4500 μW/cm² @ 100 mm	30 mm to 500 mm	63 mm × 40 mm × 30 mm	51 mm × 31.6 mm	6	0.15 kg	4.3 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-100-30-W	White	≥ 9000 lux @ 100 mm	30 mm to 500 mm	108 mm × 30 mm × 30 mm	96 mm × 21.6 mm	4	0.2 kg	6.9 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-100-30-R	Red	≥ 5000 lux @ 100 mm	30 mm to 500 mm	108 mm × 30 mm × 30 mm	96 mm × 21.6 mm	4	0.2 kg	4.1 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-100-30-B	Blue	≥ 3000 lux @ 100 mm	30 mm to 500 mm	108 mm × 30 mm × 30 mm	96 mm × 21.6 mm	4	0.2 kg	5 W	24 VDC	SMR-03V-B	RG2	0.70 m
MV-LLDS-H-100-30-IR850	IR850	≥ 2260 μW/cm² @ 100 mm	30 mm to 500 mm	108 mm × 30 mm × 30 mm	96 mm × 21.6 mm	4	0.2 kg	5.5 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-100-30-IR940	IR940	≥ 2800 μW/cm² @ 100 mm	30 mm to 500 mm	108 mm × 30 mm × 30 mm	96 mm × 21.6 mm	4	0.2 kg	5.8 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-100-40-W	White	≥ 16000 lux @ 100 mm	30 mm to 500 mm	108 mm × 40 mm × 30 mm	96 mm × 31.6 mm	6	0.23 kg	10.6 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-100-40-R	Red	≥ 6500 lux @ 100 mm	30 mm to 500 mm	108 mm × 40 mm × 30 mm	96 mm × 31.6 mm	6	0.23 kg	6 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-100-40-B	Blue	≥ 4800 lux @ 100 mm	30 mm to 500 mm	108 mm × 40 mm × 30 mm	96 mm × 31.6 mm	6	0.23 kg	7.7 W	24 VDC	SMR-03V-B	RG2	0.70 m
MV-LLDS-H-100-40-IR850	IR850	≥ 4300 μW/cm² @ 100 mm	30 mm to 500 mm	108 mm × 40 mm × 30 mm	96 mm × 31.6 mm	6	0.23 kg	8.4 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-100-40-IR940	IR940	≥ 4500 μW/cm² @ 100 mm	30 mm to 500 mm	108 mm × 40 mm × 30 mm	96 mm × 31.6 mm	6	0.23 kg	8.6 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-150-30-W	White	≥ 14000 lux @ 100 mm	30 mm to 500 mm	153 mm × 30 mm × 30 mm	141 mm × 21.6 mm	4	0.28 kg	10 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-150-30-R	Red	≥ 5000 lux @ 100 mm	30 mm to 500 mm	153 mm × 30 mm × 30 mm	141 mm × 21.6 mm	4	0.28 kg	6 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-150-30-B	Blue	≥ 3000 lux @ 100 mm	30 mm to 500 mm	153 mm × 30 mm × 30 mm	141 mm × 21.6 mm	4	0.28 kg	7.7 W	24 VDC	SMR-03V-B	RG2	0.70 m
MV-LLDS-H-150-30-IR850	IR850	≥ 2260 μW/cm² @ 100 mm	30 mm to 500 mm	153 mm × 30 mm × 30 mm	141 mm × 21.6 mm	4	0.28 kg	8.4 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-150-30-IR940	IR940	≥ 2800 μW/cm² @ 100 mm	30 mm to 500 mm	153 mm × 30 mm × 30 mm	141 mm × 21.6 mm	4	0.28 kg	8.6 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-150-40-W	White	≥ 22000 lux @ 100 mm	30 mm to 500 mm	153 mm × 40 mm × 30 mm	141 mm × 31.6 mm	6	0.32 kg	15.7 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-150-40-R	Red	≥ 6500 lux @ 100 mm	30 mm to 500 mm	153 mm × 40 mm × 30 mm	141 mm × 31.6 mm	6	0.32 kg	8.9 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-150-40-B	Blue	≥ 4800 lux @ 100 mm	30 mm to 500 mm	153 mm × 40 mm × 30 mm	141 mm × 31.6 mm	6	0.32 kg	11.3 W	24 VDC	SMR-03V-B	RG2	0.70 m
MV-LLDS-H-150-40-IR850	IR850	≥ 4300 μW/cm² @ 100 mm	30 mm to 500 mm	153 mm × 40 mm × 30 mm	141 mm × 31.6 mm	6	0.32 kg	12.7 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-150-40-IR940	IR940	≥ 4500 μW/cm² @ 100 mm	30 mm to 500 mm	153 mm × 40 mm × 30 mm	141 mm × 31.6 mm	6	0.32 kg	13 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-200-30-W	White	≥ 15000 lux @ 100 mm	30 mm to 500 mm	198 mm × 30 mm × 30 mm	186 mm × 21.6 mm	4	0.36 kg	13.5 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-200-30-R	Red	≥ 5000 lux @ 100 mm	30 mm to 500 mm	198 mm × 30 mm × 30 mm	186 mm × 21.6 mm	4	0.36 kg	6 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-200-30-B	Blue	≥ 3000 lux @ 100 mm	30 mm to 500 mm	198 mm × 30 mm × 30 mm	186 mm × 21.6 mm	4	0.36 kg	10.3 W	24 VDC	SMR-03V-B	RG2	0.70 m
MV-LLDS-H-200-30-IR850	IR850	≥ 2260 μW/cm² @ 100 mm	30 mm to 500 mm	198 mm × 30 mm × 30 mm	186 mm × 21.6 mm	4	0.36 kg	11.3 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-200-30-IR940	IR940	≥ 2800 μW/cm² @ 100 mm	30 mm to 500 mm	198 mm × 30 mm × 30 mm	186 mm × 21.6 mm	4	0.36 kg	11.5 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-200-40-W	White	≥ 30000 lux @ 100 mm	30 mm to 500 mm	198 mm × 40 mm × 30 mm	186 mm × 31.6 mm	6	0.41 kg	20.9 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-200-40-R	Red	≥ 6500 lux @ 100 mm	30 mm to 500 mm	198 mm × 40 mm × 30 mm	186 mm × 31.6 mm	6	0.41 kg	12 W	24 VDC	SMR-03V-B	No danger	/

Specification

Parameter Model	Performance			Structure				Electrical feature			Irradiation	
	Color	Center illuminance/irradiance	Best working distance	Dimension	Emitting area dimension	LED rows	Weight	Power	Input voltage	Connector type	Safety class	Safety distance
MV-LLDS-H-200-40-B	Blue	≥ 4800 lux @ 100 mm	30 mm to 500 mm	198 mm × 40 mm × 30 mm	186 mm × 31.6 mm	6	0.41 kg	15.4 W	24 VDC	SMR-03V-B	RG2	0.70 m
MV-LLDS-H-200-40-IR850	IR850	≥ 4300 μW/cm² @ 100 mm	30 mm to 500 mm	198 mm × 40 mm × 30 mm	186 mm × 31.6 mm	6	0.41 kg	16.8 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-200-40-IR940	IR940	≥ 4500 μW/cm² @ 100 mm	30 mm to 500 mm	198 mm × 40 mm × 30 mm	186 mm × 31.6 mm	6	0.41 kg	17.3 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-250-30- W	White	≥ 15000 lux @ 100 mm	30 mm to 500 mm	243 mm × 30 mm × 30 mm	231 mm × 21.6 mm	4	0.43 kg	16.9 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-250-30- R	Red	≥ 5000 lux @ 100 mm	30 mm to 500 mm	243 mm × 30 mm × 30 mm	231 mm × 21.6 mm	4	0.43 kg	9.8 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-250-30- B	Blue	≥ 3000 lux @ 100 mm	30 mm to 500 mm	243 mm × 30 mm × 30 mm	231 mm × 21.6 mm	4	0.43 kg	12.7 W	24 VDC	SMR-03V-B	RG2	0.70 m
MV-LLDS-H-250-30- IR850	IR850	≥ 2260 μW/cm² @ 100 mm	30 mm to 500 mm	243 mm × 30 mm × 30 mm	231 mm × 21.6 mm	4	0.43 kg	14.2 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-250-30- IR940	IR940	≥ 2800 μW/cm² @ 100 mm	30 mm to 500 mm	243 mm × 30 mm × 30 mm	231 mm × 21.6 mm	4	0.43 kg	14.4 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-250-40-W	White	≥ 30000 lux @ 100 mm	30 mm to 500 mm	243 mm × 40 mm × 30 mm	231 mm × 31.6 mm	6	0.49 kg	26.2 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-250-40-R	Red	≥ 6500 lux @ 100 mm	30 mm to 500 mm	243 mm × 40 mm × 30 mm	231 mm × 31.6 mm	6	0.49 kg	14.9 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-250-40-B	Blue	≥ 4800 lux @ 100 mm	30 mm to 500 mm	243 mm × 40 mm × 30 mm	231 mm × 31.6 mm	6	0.49 kg	19 W	24 VDC	SMR-03V-B	RG2	0.70 m
MV-LLDS-H-250-40-IR850	IR850	≥ 4300 μW/cm² @ 100 mm	30 mm to 500 mm	243 mm × 40 mm × 30 mm	231 mm × 31.6 mm	6	0.49 kg	21.1 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-250-40-IR940	IR940	≥ 4500 μW/cm² @ 100 mm	30 mm to 500 mm	243 mm × 40 mm × 30 mm	231 mm × 31.6 mm	6	0.49 kg	21.6 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-300-30-W	White	≥ 15000 lux @ 100 mm	30 mm to 500 mm	288 mm × 30 mm × 30 mm	276 mm × 21.6 mm	4	0.51 kg	20.1 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-300-30-R	Red	≥ 5000 lux @ 100 mm	30 mm to 500 mm	288 mm × 30 mm × 30 mm	276 mm × 21.6 mm	4	0.51 kg	12 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-300-30-B	Blue	≥ 3000 lux @ 100 mm	30 mm to 500 mm	288 mm × 30 mm × 30 mm	276 mm × 21.6 mm	4	0.51 kg	15.4 W	24 VDC	SMR-03V-B	RG2	0.70 m
MV-LLDS-H-300-30-IR850	IR850	≥ 2260 μW/cm² @ 100 mm	30 mm to 500 mm	288 mm × 30 mm × 30 mm	276 mm × 21.6 mm	4	0.51 kg	16.8 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-300-30-IR940	IR940	≥ 2800 μW/cm² @ 100 mm	30 mm to 500 mm	288 mm × 30 mm × 30 mm	276 mm × 21.6 mm	4	0.51 kg	17.3 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-300-40-W	White	≥ 30000 lux @ 100 mm	30 mm to 500 mm	288 mm × 40 mm × 30 mm	276 mm × 31.6 mm	6	0.57 kg	31.3 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-300-40-R	Red	≥ 6500 lux @ 100 mm	30 mm to 500 mm	288 mm × 40 mm × 30 mm	276 mm × 31.6 mm	6	0.57 kg	18 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-300-40-B	Blue	≥ 4800 lux @ 100 mm	30 mm to 500 mm	288 mm × 40 mm × 30 mm	276 mm × 31.6 mm	6	0.57 kg	23 W	24 VDC	SMR-03V-B	RG2	0.70 m
MV-LLDS-H-300-40-IR850	IR850	≥ 4300 μW/cm² @ 100 mm	30 mm to 500 mm	288 mm × 40 mm × 30 mm	276 mm × 31.6 mm	6	0.57 kg	25.4 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-300-40-IR940	IR940	≥ 4500 μW/cm² @ 100 mm	30 mm to 500 mm	288 mm × 40 mm × 30 mm	276 mm × 31.6 mm	6	0.57 kg	25.7 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-350-30-W	White	≥ 15000 lux @ 100 mm	30 mm to 500 mm	333 mm × 30 mm × 30 mm	321 mm × 21.6 mm	4	0.59 kg	23.5 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-350-30-R	Red	≥ 5000 lux @ 100 mm	30 mm to 500 mm	333 mm × 30 mm × 30 mm	321 mm × 21.6 mm	4	0.59 kg	13.9 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-350-30-B	Blue	≥ 3000 lux @ 100 mm	30 mm to 500 mm	333 mm × 30 mm × 30 mm	321 mm × 21.6 mm	4	0.59 kg	17.8 W	24 VDC	SMR-03V-B	RG2	0.70 m
MV-LLDS-H-350-30-IR850	IR850	≥ 2260 μW/cm² @ 100 mm	30 mm to 500 mm	333 mm × 30 mm × 30 mm	321 mm × 21.6 mm	4	0.59 kg	19.7 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-350-30-IR940	IR940	≥ 2800 μW/cm² @ 100 mm	30 mm to 500 mm	333 mm × 30 mm × 30 mm	321 mm × 21.6 mm	4	0.59 kg	20.2 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-350-40 W	White	≥ 30000 lux @ 100 mm	30 mm to 500 mm	333 mm × 40 mm × 30 mm	321 mm × 31.6 mm	6	0.66 kg	36.6 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-350-40-R	Red	≥ 6500 lux @ 100 mm	30 mm to 500 mm	333 mm × 40 mm × 30 mm	321 mm × 31.6 mm	6	0.66 kg	20.9 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-350-40-B	Blue	≥ 4800 lux @ 100 mm	30 mm to 500 mm	333 mm × 40 mm × 30 mm	321 mm × 31.6 mm	6	0.66 kg	26.6 W	24 VDC	SMR-03V-B	RG2	0.70 m
MV-LLDS-H-350-40-IR850	IR850	≥ 4300 μW/cm² @ 100 mm	30 mm to 500 mm	333 mm × 40 mm × 30 mm	321 mm × 31.6 mm	6	0.66 kg	29.5 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-350-40-IR940	IR940	≥ 4500 μW/cm² @ 100 mm	30 mm to 500 mm	333 mm × 40 mm × 30 mm	321 mm × 31.6 mm	6	0.66 kg	30 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-400-30-W	White	≥ 15000 lux @ 100 mm	30 mm to 500 mm	378 mm × 30 mm × 30 mm	366 mm × 21.6 mm	4	0.67 kg	26.9 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-400-30-R	Red	≥ 5000 lux @ 100 mm	30 mm to 500 mm	378 mm × 30 mm × 30 mm	366 mm × 21.6 mm	4	0.67 kg	15.8 W	24 VDC	SMR-03V-B	No danger	/

Specification

Parameter Model	Performance			Mechanical				Electrical feature			Irradiation	
	Color	Center illuminance/irradiance	Best working distance	Dimension	Emitting area dimension	LED rows	Weight	Power	Input voltage	Connector type	Safety class	Safety distance
MV-LLDS-H-400-30-B	Blue	≥ 3000 lux @ 100 mm	30 mm to 500 mm	378 mm × 30 mm × 30 mm	366 mm × 21.6 mm	4	0.67 kg	20.4 W	24 VDC	SMR-03V-B	RG2	0.70 m
MV-LLDS-H-400-30-IR850	IR850	≥ 2260 μW/cm² @ 100 mm	30 mm to 500 mm	378 mm × 30 mm × 30 mm	366 mm × 21.6 mm	4	0.67 kg	22.6 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-400-30-IR940	IR940	≥ 2800 μW/cm² @ 100 mm	30 mm to 500 mm	378 mm × 30 mm × 30 mm	366 mm × 21.6 mm	4	0.67 kg	22.8 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-400-40-W	White	≥ 30000 lux @ 100 mm	30 mm to 500 mm	378 mm × 40 mm × 30 mm	366 mm × 31.6 mm	6	0.74 kg	41.9 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-400-40-R	Red	≥ 6500 lux @ 100 mm	30 mm to 500 mm	378 mm × 40 mm × 30 mm	366 mm × 31.6 mm	6	0.74 kg	23.8 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-400-40-B	Blue	≥ 4800 lux @ 100 mm	30 mm to 500 mm	378 mm × 40 mm × 30 mm	366 mm × 31.6 mm	6	0.74 kg	30.7 W	24 VDC	SMR-03V-B	RG2	0.70 m
MV-LLDS-H-400-40-IR850	IR850	≥ 4300 μW/cm² @ 100 mm	30 mm to 500 mm	378 mm × 40 mm × 30 mm	366 mm × 31.6 mm	6	0.74 kg	33.8 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-400-40-IR940	IR940	≥ 4500 μW/cm² @ 100 mm	30 mm to 500 mm	378 mm × 40 mm × 30 mm	366 mm × 31.6 mm	6	0.74 kg	34.3 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-450-30-W	White	≥ 15000 lux @ 100 mm	30 mm to 500 mm	423 mm × 30 mm × 30 mm	411 mm × 21.6 mm	4	0.75 kg	30.1 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-450-30-R	Red	≥ 5000 lux @ 100 mm	30 mm to 500 mm	423 mm × 30 mm × 30 mm	411 mm × 21.6 mm	4	0.75 kg	18 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-450-30-B	Blue	≥ 3000 lux @ 100 mm	30 mm to 500 mm	423 mm × 30 mm × 30 mm	411 mm × 21.6 mm	4	0.75 kg	23 W	24 VDC	SMR-03V-B	RG2	0.70 m
MV-LLDS-H-450-30-IR850	IR850	≥ 2260 μW/cm² @ 100 mm	30 mm to 500 mm	423 mm × 30 mm × 30 mm	411 mm × 21.6 mm	4	0.75 kg	25.4 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-450-30-IR940	IR940	≥ 2800 μW/cm² @ 100 mm	30 mm to 500 mm	423 mm × 30 mm × 30 mm	411 mm × 21.6 mm	4	0.75 kg	25.7 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-450-40-W	White	≥ 30000 lux @ 100 mm	30 mm to 500 mm	423 mm × 40 mm × 30 mm	411 mm × 31.6 mm	6	0.83 kg	47 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-450-40-R	Red	≥ 6500 lux @ 100 mm	30 mm to 500 mm	423 mm × 40 mm × 30 mm	411 mm × 31.6 mm	6	0.83 kg	26.9 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-450-40-B	Blue	≥ 4800 lux @ 100 mm	30 mm to 500 mm	423 mm × 40 mm × 30 mm	411 mm × 31.6 mm	6	0.83 kg	34.3 W	24 VDC	SMR-03V-B	RG2	0.70 m
MV-LLDS-H-450-40-IR850	IR850	≥ 4300 μW/cm² @ 100 mm	30 mm to 500 mm	423 mm × 40 mm × 30 mm	411 mm × 31.6 mm	6	0.83 kg	37.9 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-450-40-IR940	IR940	≥ 4500 μW/cm² @ 100 mm	30 mm to 500 mm	423 mm × 40 mm × 30 mm	411 mm × 31.6 mm	6	0.83 kg	38.6 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-500-30-W	White	≥ 15000 lux @ 100 mm	30 mm to 500 mm	468 mm × 30 mm × 30 mm	456 mm × 21.6 mm	4	0.83 kg	33.5 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-500-30-R	Red	≥ 5000 lux @ 100 mm	30 mm to 500 mm	468 mm × 30 mm × 30 mm	456 mm × 21.6 mm	4	0.83 kg	19.9 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-500-30-B	Blue	≥ 3000 lux @ 100 mm	30 mm to 500 mm	468 mm × 30 mm × 30 mm	456 mm × 21.6 mm	4	0.83 kg	25.4 W	24 VDC	SMR-03V-B	RG2	0.70 m
MV-LLDS-H-500-30-IR850	IR850	≥ 2260 μW/cm² @ 100 mm	30 mm to 500 mm	468 mm × 30 mm × 30 mm	456 mm × 21.6 mm	4	0.83 kg	28.1 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-500-30-IR940	IR940	≥ 2800 μW/cm² @ 100 mm	30 mm to 500 mm	468 mm × 30 mm × 30 mm	456 mm × 21.6 mm	4	0.83 kg	28.6 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-500-40-W	White	≥ 30000 lux @ 100 mm	30 mm to 500 mm	468 mm × 40 mm × 30 mm	456 mm × 31.6 mm	6	0.91 kg	52.2 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-500-40-R	Red	≥ 6500 lux @ 100 mm	30 mm to 500 mm	468 mm × 40 mm × 30 mm	456 mm × 31.6 mm	6	0.91 kg	29.8 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-500-40-B	Blue	≥ 4800 lux @ 100 mm	30 mm to 500 mm	468 mm × 40 mm × 30 mm	456 mm × 31.6 mm	6	0.91 kg	38.4 W	24 VDC	SMR-03V-B	RG2	0.70 m
MV-LLDS-H-500-40-IR850	IR850	≥ 4300 μW/cm² @ 100 mm	30 mm to 500 mm	468 mm × 40 mm × 30 mm	456 mm × 31.6 mm	6	0.91 kg	42.2 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-500-40-IR940	IR940	≥ 4500 μW/cm² @ 100 mm	30 mm to 500 mm	468 mm × 40 mm × 30 mm	456 mm × 31.6 mm	6	0.91 kg	43 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-600-30-W	White	≥ 15000 lux @ 100 mm	30 mm to 500 mm	558 mm × 30 mm × 30 mm	546 mm × 21.6 mm	4	0.98 kg	40.1 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-600-30-R	Red	≥ 5000 lux @ 100 mm	30 mm to 500 mm	558 mm × 30 mm × 30 mm	546 mm × 21.6 mm	4	0.98 kg	23.8 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-600-30-B	Blue	≥ 3000 lux @ 100 mm	30 mm to 500 mm	558 mm × 30 mm × 30 mm	546 mm × 21.6 mm	4	0.98 kg	30.7 W	24 VDC	SMR-03V-B	RG2	0.70 m
MV-LLDS-H-600-30-IR850	IR850	≥ 2260 μW/cm² @ 100 mm	30 mm to 500 mm	558 mm × 30 mm × 30 mm	546 mm × 21.6 mm	4	0.98 kg	33.8 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-600-30-IR940	IR940	≥ 2800 μW/cm² @ 100 mm	30 mm to 500 mm	558 mm × 30 mm × 30 mm	546 mm × 21.6 mm	4	0.98 kg	34.3 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-600-40-W	White	≥ 30000 lux @ 100 mm	30 mm to 500 mm	558 mm × 40 mm × 30 mm	546 mm × 31.6 mm	6	1.08 kg	62.6 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-600-40-R	Red	≥ 6500 lux @ 100 mm	30 mm to 500 mm	558 mm × 40 mm × 30 mm	546 mm × 31.6 mm	6	1.08 kg	35.8 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-600-40-B	Blue	≥ 4800 lux @ 100 mm	30 mm to 500 mm	558 mm × 40 mm × 30 mm	546 mm × 31.6 mm	6	1.08 kg	45.6 W	24 VDC	SMR-03V-B	RG2	0.70 m
MV-LLDS-H-600-40-IR850	IR850	≥ 4300 μW/cm² @ 100 mm	30 mm to 500 mm	558 mm × 40 mm × 30 mm	546 mm × 31.6 mm	6	1.08 kg	50.6 W	24 VDC	SMR-03V-B	No danger	/

Specification

Parameter Model	Performance			Mechanical				Electrical feature			Irradiation	
	Color	Center illuminance/irradiance	Best working distance	Dimension	Emitting area dimension	LED rows	Weight	Power	Input voltage	Connector type	Safety class	Safety distance
MV-LLDS-H-600-40-IR940	IR940	≥ 4500 μW/cm ² @ 100 mm	30 mm to 500 mm	558 mm × 40 mm × 30 mm	546 mm × 31.6 mm	6	1.08 kg	51.6 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-700-30-W	White	≥ 15000 lux @ 100 mm	30 mm to 500 mm	648 mm × 30 mm × 30 mm	636 mm × 21.6 mm	4	1.14 kg	47 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-700-30-R	Red	≥ 5000 lux @ 100 mm	30 mm to 500 mm	648 mm × 30 mm × 30 mm	636 mm × 21.6 mm	4	1.14 kg	27.8 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-700-30-B	Blue	≥ 3000 lux @ 100 mm	30 mm to 500 mm	648 mm × 30 mm × 30 mm	636 mm × 21.6 mm	4	1.14 kg	35.8 W	24 VDC	SMR-03V-B	RG2	0.70 m
MV-LLDS-H-700-30-IR850	IR850	≥ 2260 μW/cm ² @ 100 mm	30 mm to 500 mm	648 mm × 30 mm × 30 mm	636 mm × 21.6 mm	4	1.14 kg	39.4 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-700-30-IR940	IR940	≥ 2800 μW/cm ² @ 100 mm	30 mm to 500 mm	648 mm × 30 mm × 30 mm	636 mm × 21.6 mm	4	1.14 kg	40.1 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-700-40-W	White	≥ 30000 lux @ 100 mm	30 mm to 500 mm	648 mm × 40 mm × 30 mm	636 mm × 31.6 mm	6	1.26 kg	73.2 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-700-40-R	Red	≥ 6500 lux @ 100 mm	30 mm to 500 mm	648 mm × 40 mm × 30 mm	636 mm × 31.6 mm	6	1.26 kg	41.8 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-700-40-B	Blue	≥ 4800 lux @ 100 mm	30 mm to 500 mm	648 mm × 40 mm × 30 mm	636 mm × 31.6 mm	6	1.26 kg	53.3 W	24 VDC	SMR-03V-B	RG2	0.70 m
MV-LLDS-H-700-40-IR850	IR850	≥ 4300 μW/cm ² @ 100 mm	30 mm to 500 mm	648 mm × 40 mm × 30 mm	636 mm × 31.6 mm	6	1.26 kg	59 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-700-40-IR940	IR940	≥ 4500 μW/cm ² @ 100 mm	30 mm to 500 mm	648 mm × 40 mm × 30 mm	636 mm × 31.6 mm	6	1.26 kg	60.2 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-800-30-W	White	≥ 15000 lux @ 100 mm	30 mm to 500 mm	738 mm × 30 mm × 30 mm	726 mm × 21.6 mm	4	1.29 kg	53.6 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-800-30-R	Red	≥ 5000 lux @ 100 mm	30 mm to 500 mm	738 mm × 30 mm × 30 mm	726 mm × 21.6 mm	4	1.29 kg	31.9 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-800-30-B	Blue	≥ 3000 lux @ 100 mm	30 mm to 500 mm	738 mm × 30 mm × 30 mm	726 mm × 21.6 mm	4	1.29 kg	40.6 W	24 VDC	SMR-03V-B	RG2	0.70 m
MV-LLDS-H-800-30-IR850	IR850	≥ 2260 μW/cm ² @ 100 mm	30 mm to 500 mm	738 mm × 30 mm × 30 mm	726 mm × 21.6 mm	4	1.29 kg	45.1 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-800-30-IR940	IR940	≥ 2800 μW/cm ² @ 100 mm	30 mm to 500 mm	738 mm × 30 mm × 30 mm	726 mm × 21.6 mm	4	1.29 kg	45.8 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-800-40-W	White	≥ 29000 lux @ 100 mm	30 mm to 500 mm	738 mm × 40 mm × 30 mm	726 mm × 31.6 mm	6	1.43 kg	70.9 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-800-40-R	Red	≥ 6500 lux @ 100 mm	30 mm to 500 mm	738 mm × 40 mm × 30 mm	726 mm × 31.6 mm	6	1.43 kg	47.8 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-800-40-B	Blue	≥ 4800 lux @ 100 mm	30 mm to 500 mm	738 mm × 40 mm × 30 mm	726 mm × 31.6 mm	6	1.43 kg	61.0 W	24 VDC	SMR-03V-B	RG2	0.70 m
MV-LLDS-H-800-40-IR850	IR850	≥ 4300 μW/cm ² @ 100 mm	30 mm to 500 mm	738 mm × 40 mm × 30 mm	726 mm × 31.6 mm	6	1.43 kg	67.7 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-800-40-IR940	IR940	≥ 4500 μW/cm ² @ 100 mm	30 mm to 500 mm	738 mm × 40 mm × 30 mm	726 mm × 31.6 mm	6	1.43 kg	68.6 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-900-30-W	White	≥ 15000 lux @ 100 mm	30 mm to 500 mm	828 mm × 30 mm × 30 mm	816 mm × 21.6 mm	4	1.45 kg	60.2 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-900-30-R	Red	≥ 5000 lux @ 100 mm	30 mm to 500 mm	828 mm × 30 mm × 30 mm	816 mm × 21.6 mm	4	1.45 kg	35.8 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-900-30-B	Blue	≥ 3000 lux @ 100 mm	30 mm to 500 mm	828 mm × 30 mm × 30 mm	816 mm × 21.6 mm	4	1.45 kg	45.6 W	24 VDC	SMR-03V-B	RG2	0.70 m
MV-LLDS-H-900-30-IR850	IR850	≥ 2260 μW/cm ² @ 100 mm	30 mm to 500 mm	828 mm × 30 mm × 30 mm	816 mm × 21.6 mm	4	1.45 kg	50.6 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-900-30-IR940	IR940	≥ 2800 μW/cm ² @ 100 mm	30 mm to 500 mm	828 mm × 30 mm × 30 mm	816 mm × 21.6 mm	4	1.45 kg	51.6 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-900-40-W	White	≥ 29000 lux @ 100 mm	30 mm to 500 mm	828 mm × 40 mm × 30 mm	816 mm × 31.6 mm	6	1.6 kg	93.9 W	24 VDC	Dual-channel SMR-03V-B	No danger	/
MV-LLDS-H-900-40-R	Red	≥ 6500 lux @ 100 mm	30 mm to 500 mm	828 mm × 40 mm × 30 mm	816 mm × 31.6 mm	6	1.6 kg	53.8 W	24 VDC	Dual-channel SMR-03V-B	No danger	/
MV-LLDS-H-900-40-B	Blue	≥ 4800 lux @ 100 mm	30 mm to 500 mm	828 mm × 40 mm × 30 mm	816 mm × 31.6 mm	6	1.6 kg	68.6 W	24 VDC	Dual-channel SMR-03V-B	RG2	0.70 m
MV-LLDS-H-900-40-IR850	IR850	≥ 4300 μW/cm ² @ 100 mm	30 mm to 500 mm	828 mm × 40 mm × 30 mm	816 mm × 31.6 mm	6	1.6 kg	76.1 W	24 VDC	Dual-channel SMR-03V-B	No danger	/
MV-LLDS-H-900-40-IR940	IR940	≥ 4500 μW/cm ² @ 100 mm	30 mm to 500 mm	828 mm × 40 mm × 30 mm	816 mm × 31.6 mm	6	1.6 kg	77.3 W	24 VDC	Dual-channel SMR-03V-B	No danger	/
MV-LLDS-H-1000-30-W	White	≥ 15000 lux @ 100 mm	30 mm to 500 mm	918 mm × 30 mm × 30 mm	906 mm × 21.6 mm	4	1.61 kg	67.1 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-1000-30-R	Red	≥ 5000 lux @ 100 mm	30 mm to 500 mm	918 mm × 30 mm × 30 mm	906 mm × 21.6 mm	4	1.61 kg	39.8 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-1000-30-B	Blue	≥ 3000 lux @ 100 mm	30 mm to 500 mm	918 mm × 30 mm × 30 mm	906 mm × 21.6 mm	4	1.61 kg	50.9 W	24 VDC	SMR-03V-B	RG2	0.70 m
MV-LLDS-H-1000-30-IR850	IR850	≥ 2260 μW/cm ² @ 100 mm	30 mm to 500 mm	918 mm × 30 mm × 30 mm	906 mm × 21.6 mm	4	1.61 kg	56.4 W	24 VDC	SMR-03V-B	No danger	/

Parameter Model	Performance			Mechanical				Electrical feature			Irradiation	
	Color	Center illuminance/irradiance	Best working distance	Dimension	Emitting area dimension	LED rows	Weight	Power	Input voltage	Connector type	Safety class	Safety distance
MV-LLDS-H-1000-30-IR940	IR940	≥ 2800 μW/cm² @ 100 mm	30 mm to 500 mm	918 mm × 30 mm × 30 mm	906 mm × 21.6 mm	4	1.61 kg	57.4 W	24 VDC	SMR-03V-B	No danger	/
MV-LLDS-H-1000-40-W	White	≥ 29000 lux @ 100 mm	30 mm to 500 mm	918 mm × 40 mm × 30 mm	906 mm × 31.6 mm	6	1.77 kg	104.5 W	24 VDC	Dual-channel SMR-03V-B	No danger	/
MV-LLDS-H-1000-40-R	Red	≥ 6500 lux @ 100 mm	30 mm to 500 mm	918 mm × 40 mm × 30 mm	906 mm × 31.6 mm	6	1.77 kg	59.5 W	24 VDC	Dual-channel SMR-03V-B	No danger	/
MV-LLDS-H-1000-40-B	Blue	≥ 4800 lux @ 100 mm	30 mm to 500 mm	918 mm × 40 mm × 30 mm	906 mm × 31.6 mm	6	1.77 kg	76.3 W	24 VDC	Dual-channel SMR-03V-B	RG2	0.70 m
MV-LLDS-H-1000-40-IR850	IR850	≥ 4300 μW/cm² @ 100 mm	30 mm to 500 mm	918 mm × 40 mm × 30 mm	906 mm × 31.6 mm	6	1.77 kg	84.5 W	24 VDC	Dual-channel SMR-03V-B	No danger	/
MV-LLDS-H-1000-40-IR940	IR940	≥ 4500 μW/cm² @ 100 mm	30 mm to 500 mm	918 mm × 40 mm × 30 mm	906 mm × 31.6 mm	6	1.77 kg	85.9 W	24 VDC	Dual-channel SMR-03V-B	No danger	/
MV-LLDS-H-1200-30-W	White	≥ 15000 lux @ 100 mm	30 mm to 500 mm	1098 mm × 30 mm × 30 mm	1086 mm × 21.6 mm	4	1.92 kg	80.3 W	24 VDC	Dual-channel SMR-03V-B	No danger	/
MV-LLDS-H-1200-30-R	Red	≥ 5000 lux @ 100 mm	30 mm to 500 mm	1098 mm × 30 mm × 30 mm	1086 mm × 21.6 mm	4	1.92 kg	47.8 W	24 VDC	Dual-channel SMR-03V-B	No danger	/
MV-LLDS-H-1200-30-B	Blue	≥ 3000 lux @ 100 mm	30 mm to 500 mm	1098 mm × 30 mm × 30 mm	1086 mm × 21.6 mm	4	1.92 kg	61 W	24 VDC	Dual-channel SMR-03V-B	RG2	0.70 m
MV-LLDS-H-1200-30-IR850	IR850	≥ 2260 μW/cm² @ 100 mm	30 mm to 500 mm	1098 mm × 30 mm × 30 mm	1086 mm × 21.6 mm	4	1.92 kg	67.7 W	24 VDC	Dual-channel SMR-03V-B	No danger	/
MV-LLDS-H-1200-30-IR940	IR940	≥ 2800 μW/cm² @ 100 mm	30 mm to 500 mm	1098 mm × 30 mm × 30 mm	1086 mm × 21.6 mm	4	1.92 kg	68.6 W	24 VDC	Dual-channel SMR-03V-B	No danger	/
MV-LLDS-H-1200-40-W	White	≥ 28000 lux @ 100 mm	30 mm to 500 mm	1098 mm × 40 mm × 30 mm	1086 mm × 31.6 mm	6	2.11 kg	116.4 W	24 VDC	Dual-channel SMR-03V-B	No danger	/
MV-LLDS-H-1200-40-R	Red	≥ 6500 lux @ 100 mm	30 mm to 500 mm	1098 mm × 40 mm × 30 mm	1086 mm × 31.6 mm	6	2.11 kg	71.5 W	24 VDC	Dual-channel SMR-03V-B	No danger	/
MV-LLDS-H-1200-40-B	Blue	≥ 4800 lux @ 100 mm	30 mm to 500 mm	1098 mm × 40 mm × 30 mm	1086 mm × 31.6 mm	6	2.11 kg	91.7 W	24 VDC	Dual-channel SMR-03V-B	RG2	0.70 m
MV-LLDS-H-1200-40-IR850	IR850	≥ 4300 μW/cm² @ 100 mm	30 mm to 500 mm	1098 mm × 40 mm × 30 mm	1086 mm × 31.6 mm	6	2.11 kg	101.3 W	24 VDC	Dual-channel SMR-03V-B	No danger	/
MV-LLDS-H-1200-40-IR940	IR940	≥ 4500 μW/cm² @ 100 mm	30 mm to 500 mm	1098 mm × 40 mm × 30 mm	1086 mm × 31.6 mm	6	2.11 kg	103.2 W	24 VDC	Dual-channel SMR-03V-B	No danger	/
MV-LLDS-H-1300-40-W	White	≥ 28000 lux @ 100 mm	30 mm to 500 mm	1188 mm × 40 mm × 30 mm	1172.6 mm × 31.6 mm	6	2 kg	116 W	24 VDC	Dual-channel SMR-03V-B	No danger	/
MV-LLDS-H-1400-30-W	White	≥ 15000 lux @ 100 mm	30 mm to 500 mm	1278 mm × 30 mm × 30 mm	1266 mm × 21.6 mm	4	2.23 kg	93.7 W	24 VDC	Dual-channel SMR-03V-B	No danger	/
MV-LLDS-H-1400-30-R	Red	≥ 5000 lux @ 100 mm	30 mm to 500 mm	1278 mm × 30 mm × 30 mm	1266 mm × 21.6 mm	4	2.23 kg	55.7 W	24 VDC	Dual-channel SMR-03V-B	No danger	/
MV-LLDS-H-1400-30-B	Blue	≥ 3000 lux @ 100 mm	30 mm to 500 mm	1278 mm × 30 mm × 30 mm	1266 mm × 21.6 mm	4	2.23 kg	71.3 W	24 VDC	Dual-channel SMR-03V-B	RG2	0.70 m
MV-LLDS-H-1400-30-IR850	IR850	≥ 2260 μW/cm² @ 100 mm	30 mm to 500 mm	1278 mm × 30 mm × 30 mm	1266 mm × 21.6 mm	4	2.23 kg	79 W	24 VDC	Dual-channel SMR-03V-B	No danger	/
MV-LLDS-H-1400-30-IR940	IR940	≥ 2800 μW/cm² @ 100 mm	30 mm to 500 mm	1278 mm × 30 mm × 30 mm	1266 mm × 21.6 mm	4	2.23 kg	80.2 W	24 VDC	Dual-channel SMR-03V-B	No danger	/
MV-LLDS-H-1400-40-W	White	≥ 26000 lux @ 100 mm	30 mm to 500 mm	1278 mm × 40 mm × 30 mm	1266 mm × 31.6 mm	6	2.45 kg	116.5 W	24 VDC	Dual-channel SMR-03V-B	No danger	/
MV-LLDS-H-1400-40-R	Red	≥ 6500 lux @ 100 mm	30 mm to 500 mm	1278 mm × 40 mm × 30 mm	1266 mm × 31.6 mm	6	2.45 kg	83.5 W	24 VDC	Dual-channel SMR-03V-B	No danger	/
MV-LLDS-H-1400-40-B	Blue	≥ 4800 lux @ 100 mm	30 mm to 500 mm	1278 mm × 40 mm × 30 mm	1266 mm × 31.6 mm	6	2.45 kg	107 W	24 VDC	Dual-channel SMR-03V-B	RG2	0.70 m
MV-LLDS-H-1400-40-IR850	IR850	≥ 4300 μW/cm² @ 100 mm	30 mm to 500 mm	1278 mm × 40 mm × 30 mm	1266 mm × 31.6 mm	6	2.45 kg	118.3 W	24 VDC	Dual-channel SMR-03V-B	No danger	/
MV-LLDS-H-1400-40-IR940	IR940	≥ 4500 μW/cm² @ 100 mm	30 mm to 500 mm	1278 mm × 40 mm × 30 mm	1266 mm × 31.6 mm	6	2.45 kg	120 W	24 VDC	Dual-channel SMR-03V-B	No danger	/
MV-LLDS-H-1800-40-W	White	≥ 26000 lux @ 100 mm	30 mm to 500 mm	1638 mm × 40 mm × 30 mm	1622.6 mm × 31.6 mm	6	2.9 kg	162.2 W	24 VDC	12M-2A (Female)	No danger	/

Other Parameters


Parameter	Model	MV-LLDS-H
	Standard Bar Light	
Performance		
Wavelength	R: 625 nm B: 465 nm IR850: 850 nm IR940: 940 nm	
Color temperature	W: 6000K to 7500K	
Mechanical		
Cable length	1 m	
Cooling mode	Natural cooling	
Temperature	Working temperature: 0 °C to 40 °C (32 °F to 104 °F) Storage temperature: −20 °C to 60 °C (−4 °F to 140 °F)	
Humidity	20% RH to 90% RH (no condensation)	
Diffuse plate included	PMMA	

Note


Blue Light Hazard Label	Light Source Prevention
2类危险 RISK GROUP 2 警告：该产品可能有光辐射危害。 警告：灯工作时不能注视，可能伤害眼睛。 CAUTION Possibly hazardous optical radiation emitted from this product. Do not stare at operating lamp. May be harmful to the eyes.	- Measured at 200 mm distance, some models of this device have a retinal blue light hazard that belongs to the risk group 2 (RG2). Do not stare at an operating light source. - Protective measures like wearing safety goggles are required when installing, maintaining and debugging the device.

Dimension


MV-LLDS-H-50-30-*

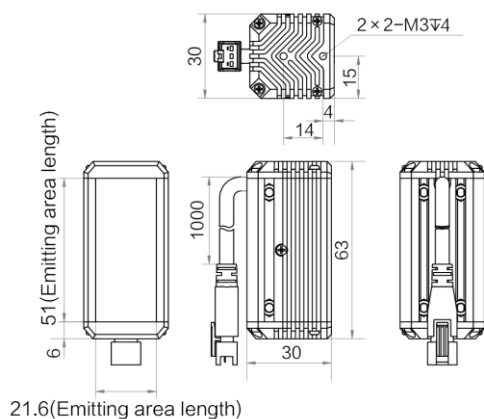


MV-LLDS-H-50-40-*

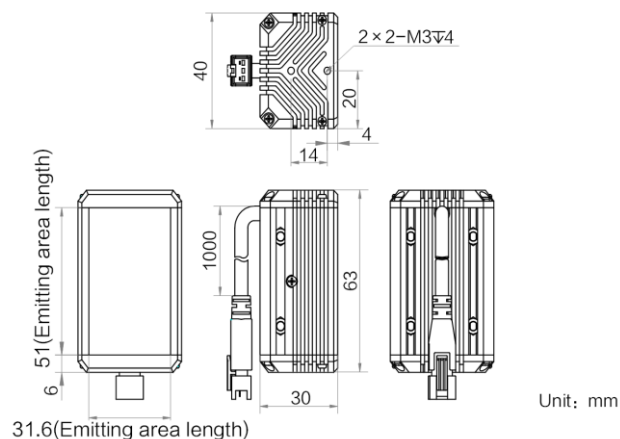


MV-LLDS-H-100-30-*

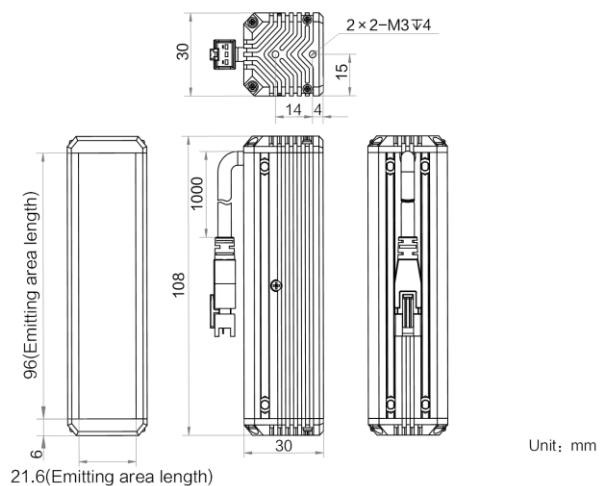


MV-LLDS-H-100-40-*

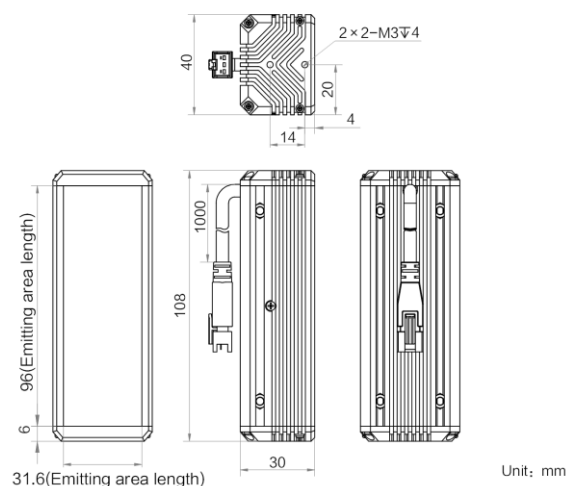


MV-LLDS-H-150-30-*

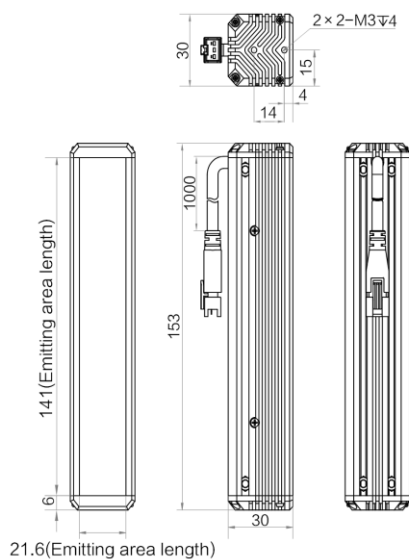

MV-LLDS-H-150-40-*

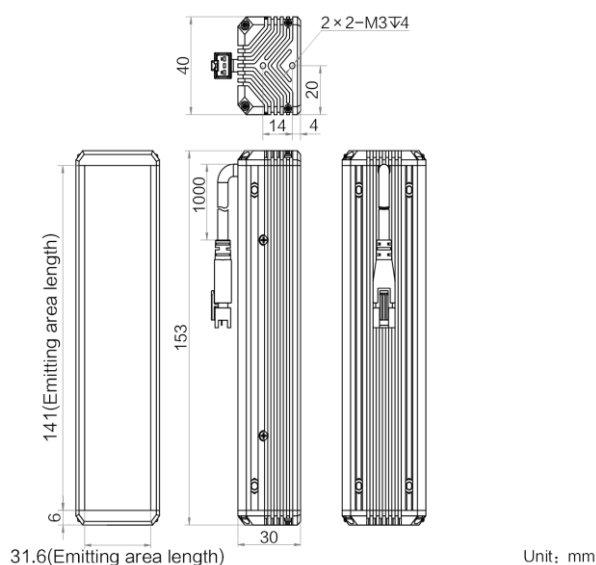


MV-LLDS-H-200-30-*

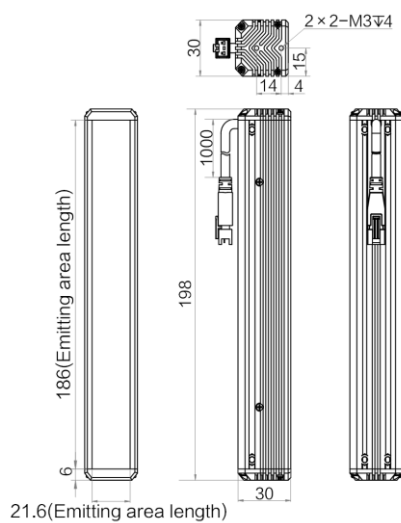


Unit: mm

MV-LLDS-H-200-40-*

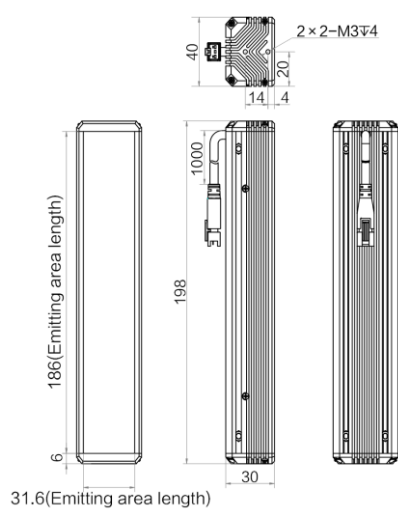


Unit: mm

MV-LLDS-H-250-30-*

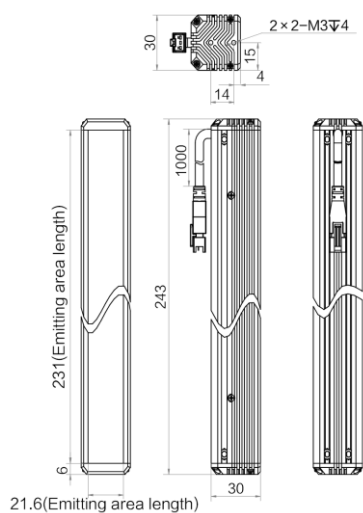


Unit: mm

MV-LLDS-H-250-40-*

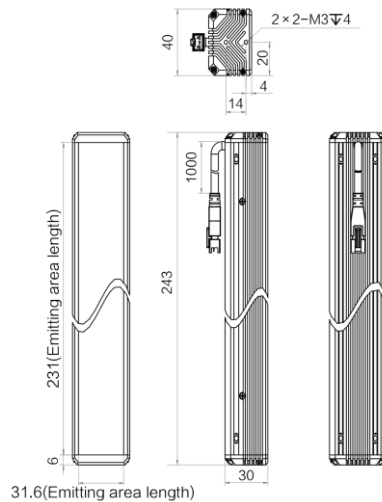


Unit: mm

MV-LLDS-H-300-30-*

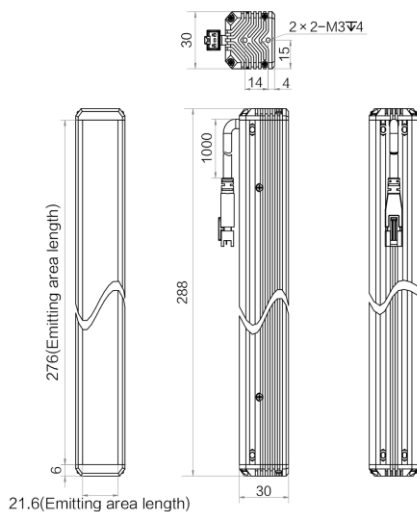


Unit: mm

MV-LLDS-H-300-40-*

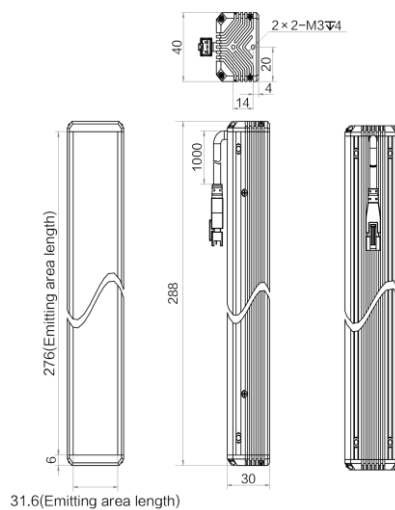


Unit: mm


MV-LLDS-H-350-30-*

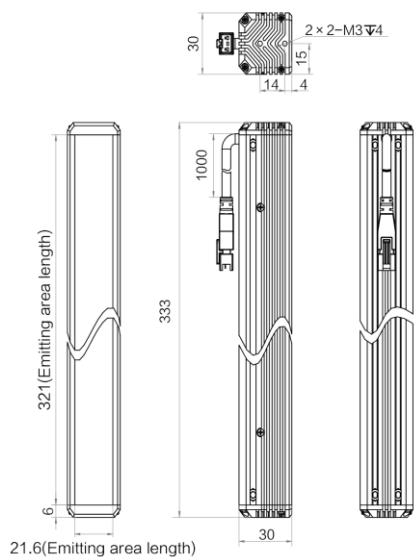


MV-LLDS-H-350-40-*

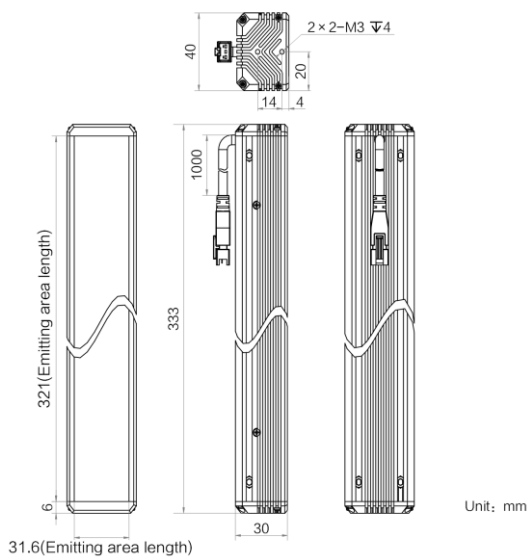


MV-LLDS-H-400-30-*

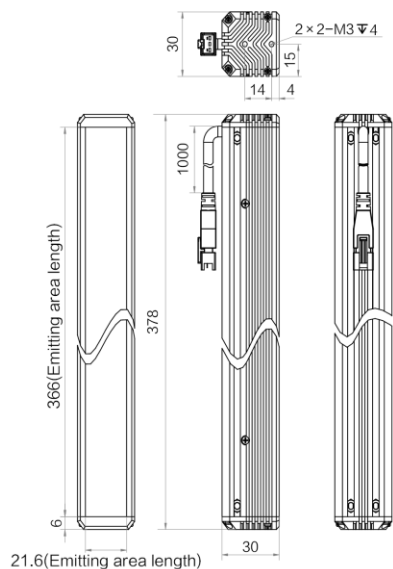


MV-LLDS-H-400-40-*

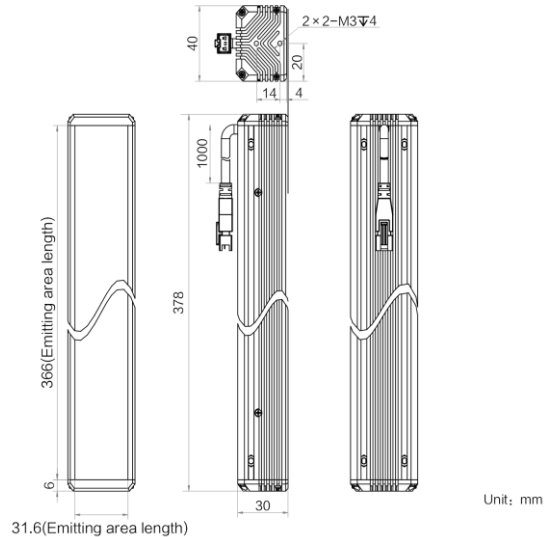


MV-LLDS-H-450-30-*

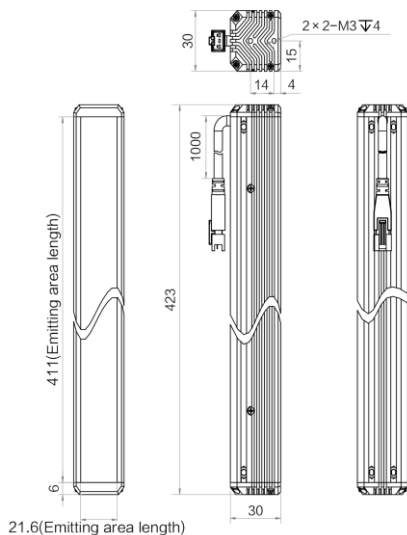

MV-LLDS-H-450-40-*

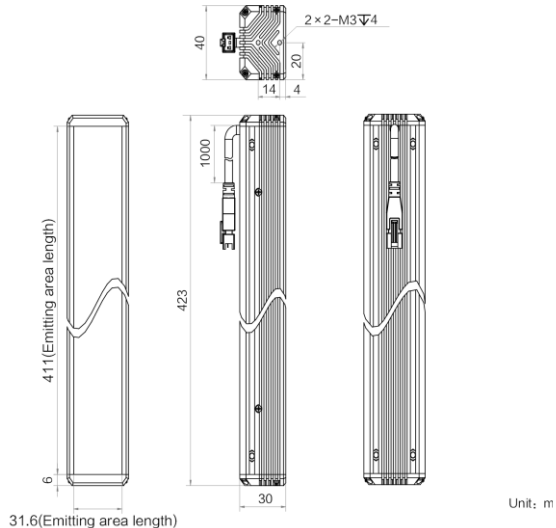


MV-LLDS-H-500-30-*

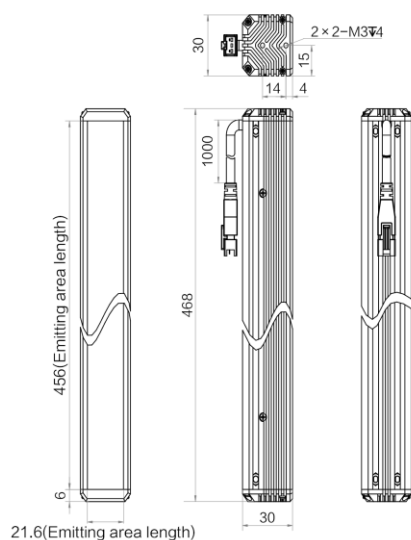


Unit: mm

MV-LLDS-H-500-40-*

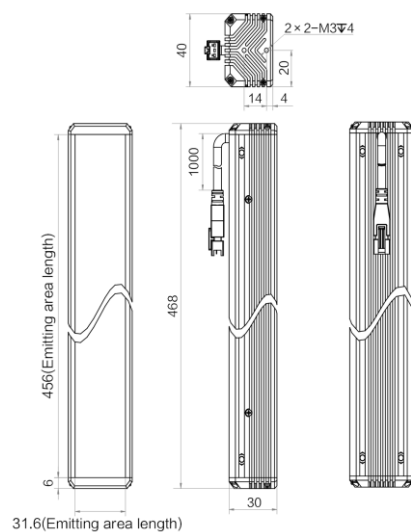


Unit: mm

MV-LLDS-H-600-30-*

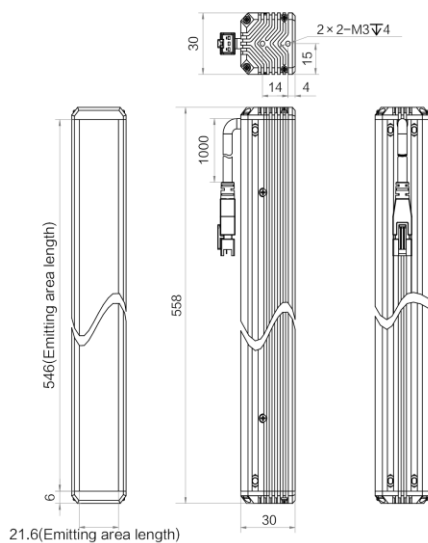


Unit: mm

MV-LLDS-H-600-40-*

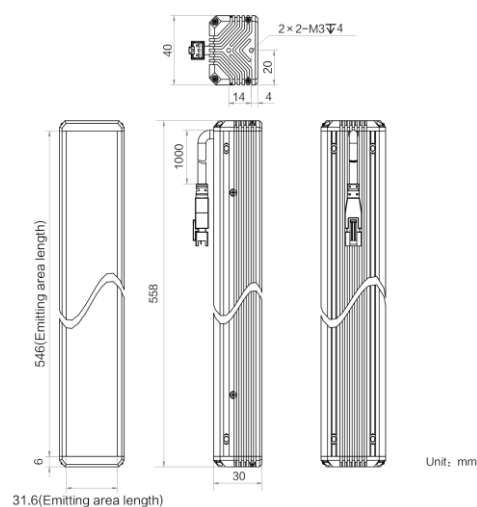


Unit: mm

MV-LLDS-H-700-30-*

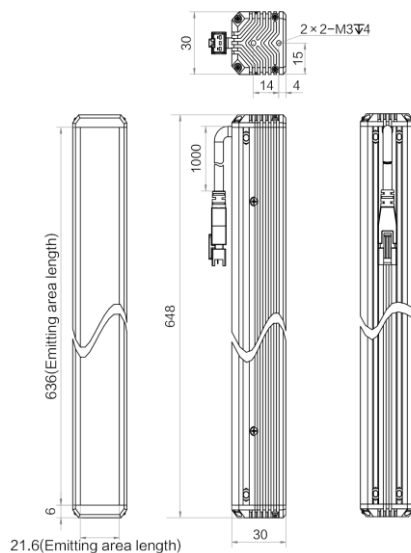


Unit: mm

MV-LLDS-H-700-40-*

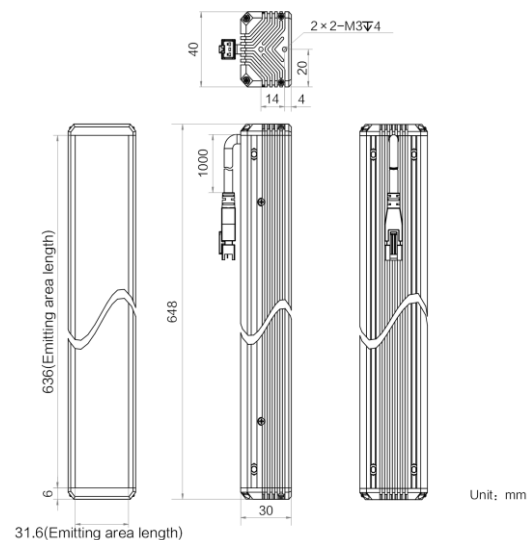


Unit: mm


MV-LLDS-H-800-30-*

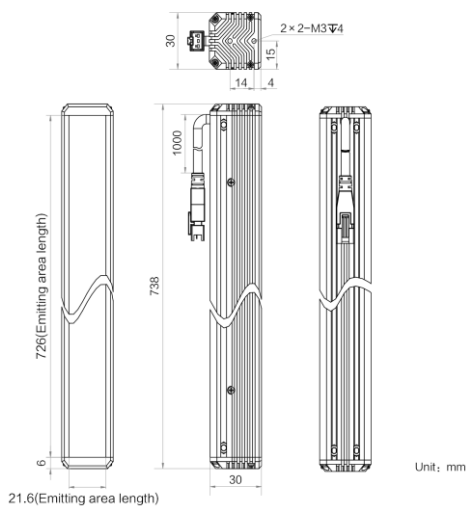


MV-LLDS-H-800-40-*

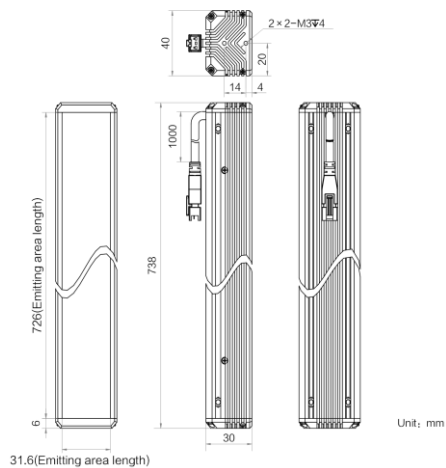


MV-LLDS-H-900-30-*

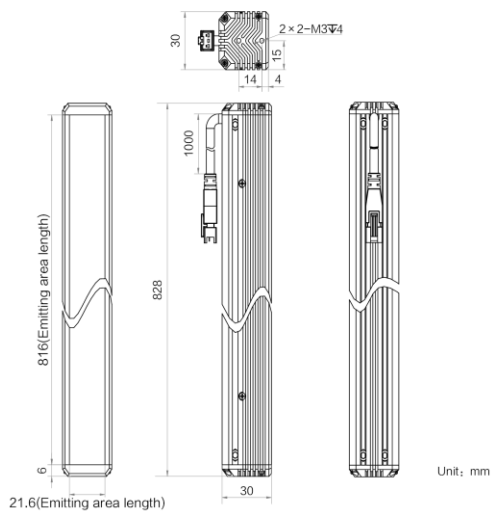


MV-LLDS-H-900-40-*

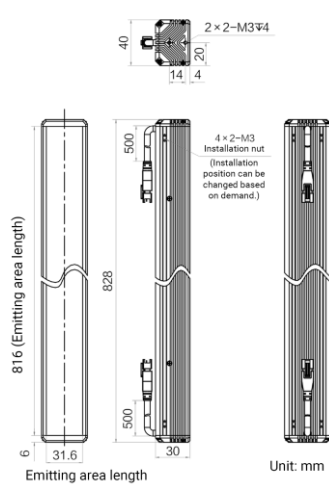


MV-LLDS-H-1000-30-*

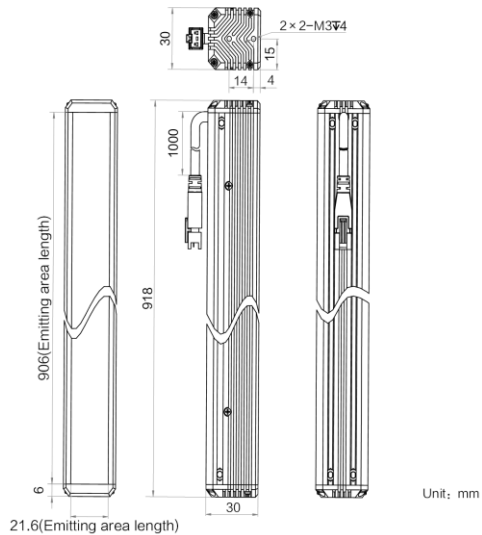


MV-LLDS-H-1000-40-*

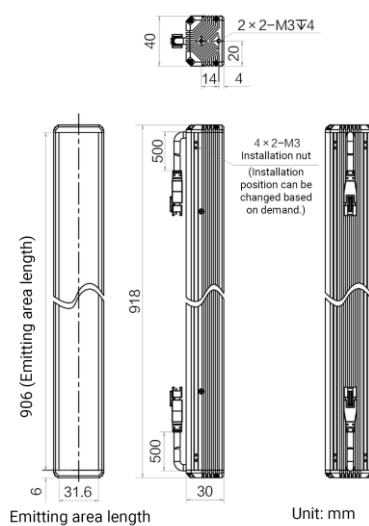


MV-LLDS-H-1200-30-*

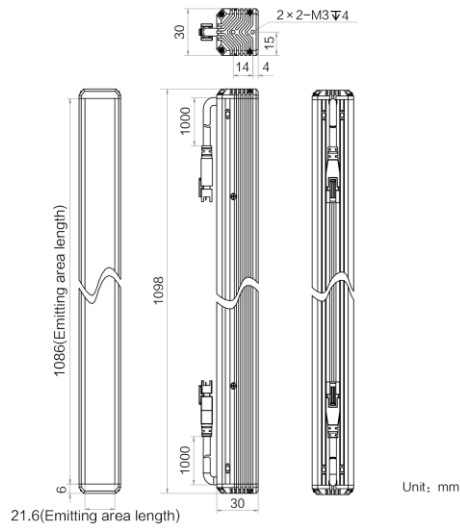


MV-LLDS-H-1200-40-*

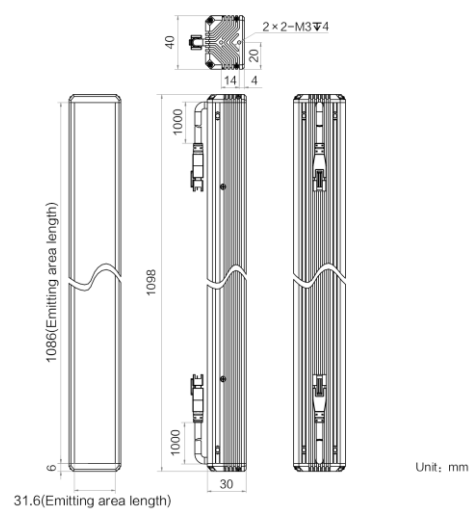


MV-LLDS-H-1300-40-*

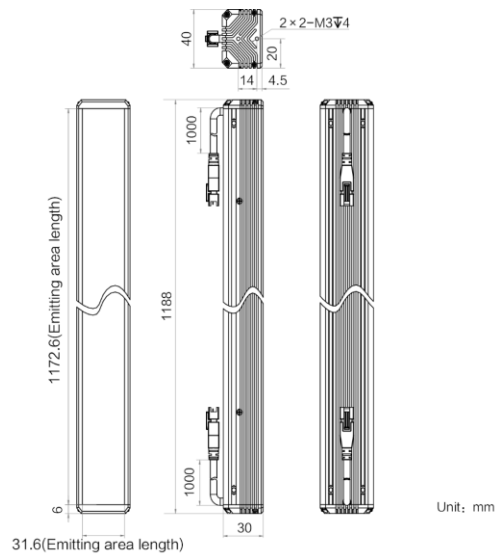


MV-LLDS-H-1400-30-*

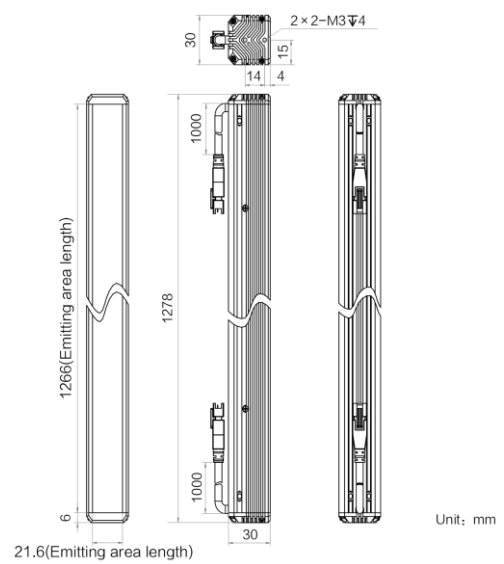

MV-LLDS-H-1400-40-*

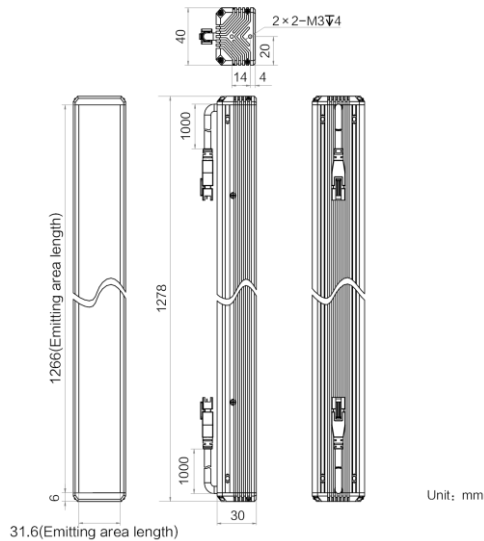

MV-LLDS-H-1800-40-*

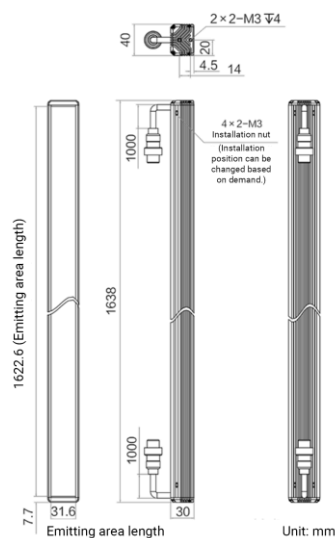

HIKROBOT

Hangzhou Hikrobot Co., Ltd.
en.hikrobotics.com

© Hangzhou Hikrobot Co., Ltd. All Rights Reserved.

Hangzhou Hikrobot does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.