

MV-RS-Ultra-M Galvanometer Laser 3D Camera

MV-RS-Ultra-M galvanometer laser 3D camera adopts laser and high-precision galvanometer technology, combined with high-resolution color imaging system and built-in 3D image processing algorithm with high robustness to obtain the RGB-D image with sub-millimeter measurement accuracy.



RoHS

Key Features

- Customized optical system provides high-quality image.
- Supports high-uniformity laser module to provide a more detailed point cloud.
- Supports multi-core parallel processing with high precision and high image acquisition rate.
- Supports alignment between depth images and RGB images, convenient for secondary development.
- Adopts high-strength carbon fiber design with high stability.

Typical Application

- Workpiece loading and unloading
- Random bin picking
- Alignment assembly

Available Model

- MV-RS-Ultra-M V3.0




Specification

Model	MV-RS-Ultra-M
Performance	
Near field of view	540 mm × 530 mm @ 700 mm
Typical field of view	890 mm × 760 mm @ 1000 mm
Far field of view	1240 mm × 1060 mm @ 1400 mm
Clearance distance (CD)	700 mm
Measurement range (MR)	700 mm
Repeatability (Z-axis) ¹	0.06 mm @ 1000 mm
VDI/VDE accuracy ²	0.12 mm @ 1000 mm
Resolution	RGB: 4000 × 3000 Depth: 2448 × 2048
Data acquisition time	0.4 s to 0.9 s
Image output delay	1.0 s to 1.7 s
Data type	Original image (mono and color images), depth image, RGB-D image
Electrical feature	
Data interface	Gigabit Ethernet (1000 Mbit/s)
Digital I/O	12-pin M12 interface provides power and I/O, including opto-isolated input × 3 (Line 0/3/6), opto-isolated output × 3 (Line 1/4/7)
Power supply	24 VDC
Power consumption	Typ. 15 W @ 24 VDC
Mechanical	
Dimension	385.7 mm × 81.8 mm × 127 mm (15.2" × 3.2" × 5")
Weight	Approx. 2.3 kg (5.1 lb.)
Ingress protection	IP65
Temperature	Working temperature: 0 °C to 45 °C (32 °F to 113 °F) Storage temperature: -30 °C to 80 °C (-22 °F to 176 °F)
Humidity	20% RH to 85% RH (no condensation)
Laser	
Laser safety class	Class 2
Wavelength	638 nm
General	
Client software	RobotPilot, HiViewer
Operating system	32/64-bit Windows 7/10, 64-bit Windows 11
Certification	RoHS

1: This value is the standard deviation of 100 depth value measurements. The measurement target is a ceramic plate.


2: The measurement targets are double ceramic balls with a diameter of 30 mm and a ball spacing of 100 mm. Refer to VDI/VDE 2634 Part II standard.

Dimension

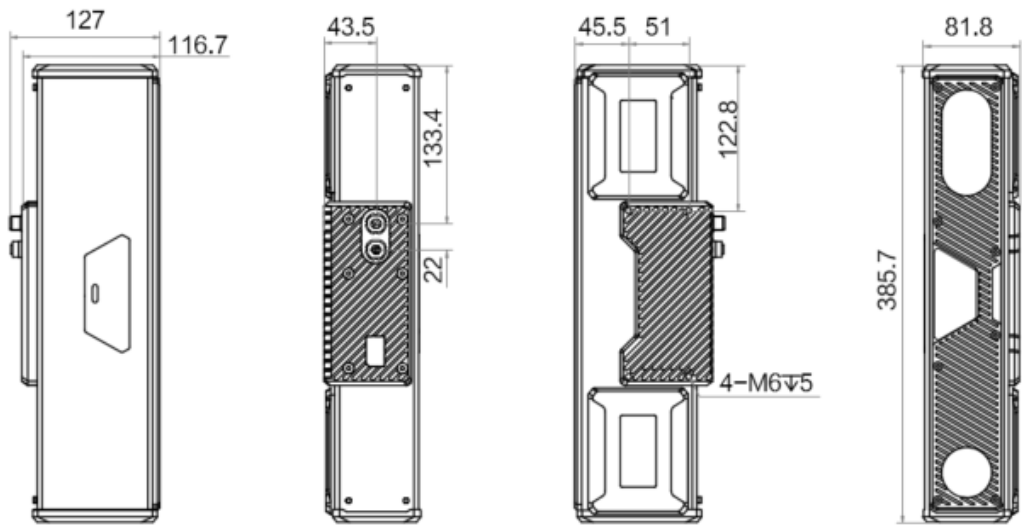


Unit: mm

Installation Axonometric Drawing

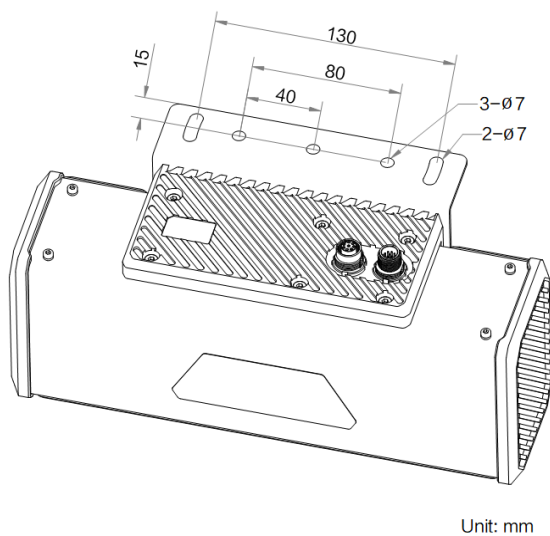

Unit: mm

Measurement Range Diagram

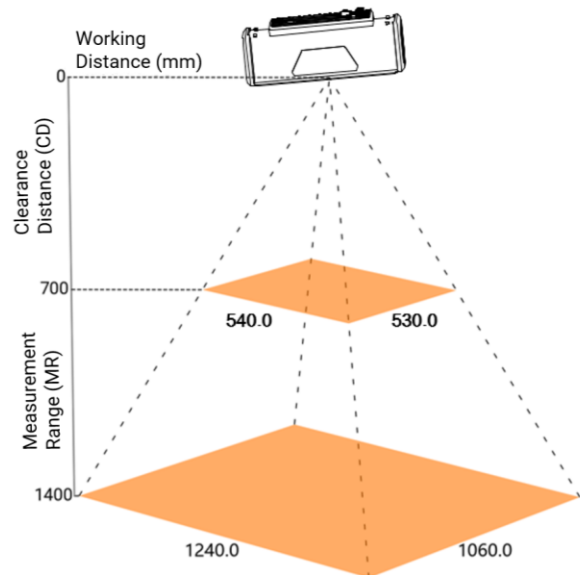

HIKROBOT

Hangzhou Hikrobot Co., Ltd.
en.hikrobotics.com

© Hangzhou Hikrobot Co., Ltd. All Rights Reserved.
Hangzhou Hikrobot does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.