MV-ACCL-SDR-SDR-HF

SDR26 High-Flex Data Cable

The SDR26 High-Flex Data Cable can be used for data transmission of Camera Link interface cameras, and is available in a variety of lengths.



Applicable Product

Hikrobot Camera Link Area Scan Cameras
Hikrobot Camera Link Line Scan Cameras

Available Model

- 3 m length: MV-ACCL-SDR-SDR-HF-3m
- 5 m length: MV-ACCL-SDR-SDR-HF-5m
- 7 m length: MV-ACCL-SDR-SDR-HF-7m
- 10 m length (with ring magnet): MV-ACCL-SDR-SDR-HF-10m

Dimension

MV-ACCL-SDR-SDR-HF-3m

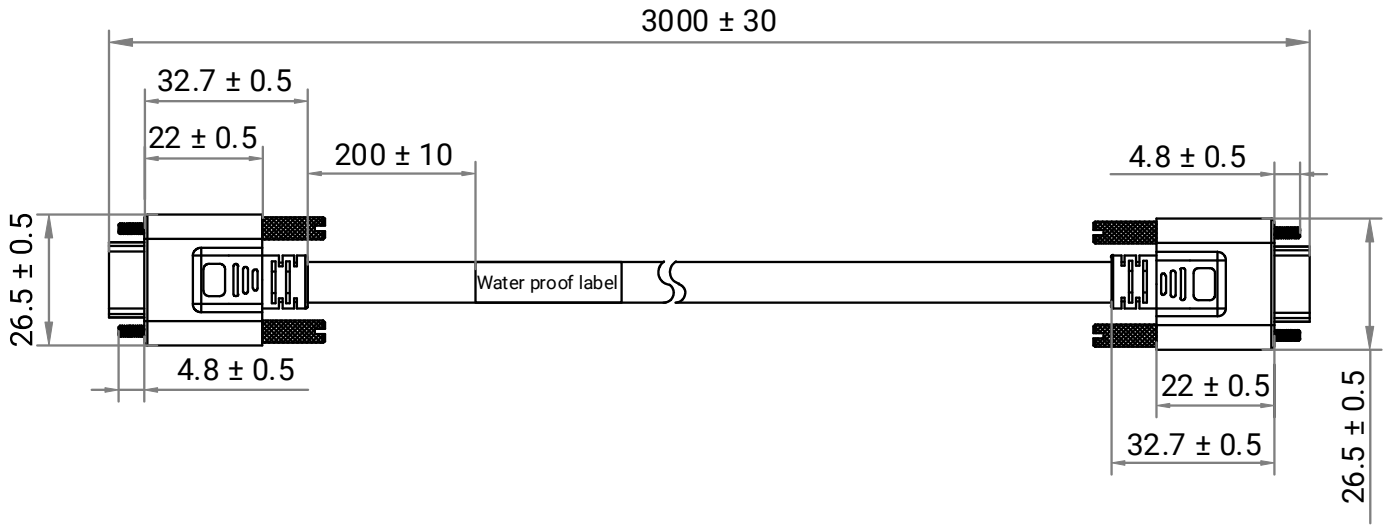

Unit: mm

MV-ACCL-SDR-SDR-HF-5m

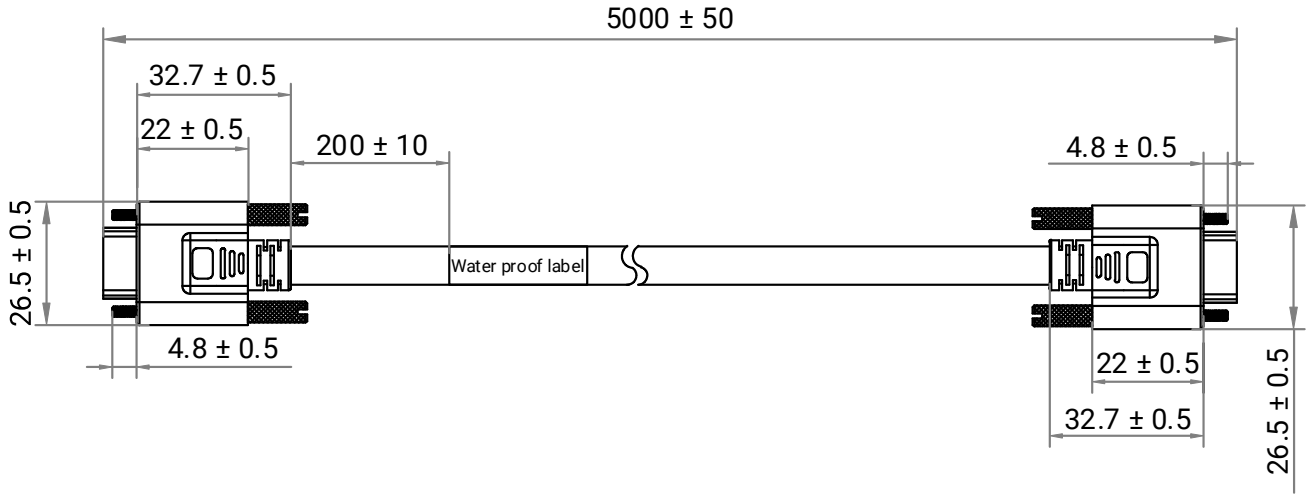

Unit: mm

MV-ACCL-SDR-SDR-HF-7m

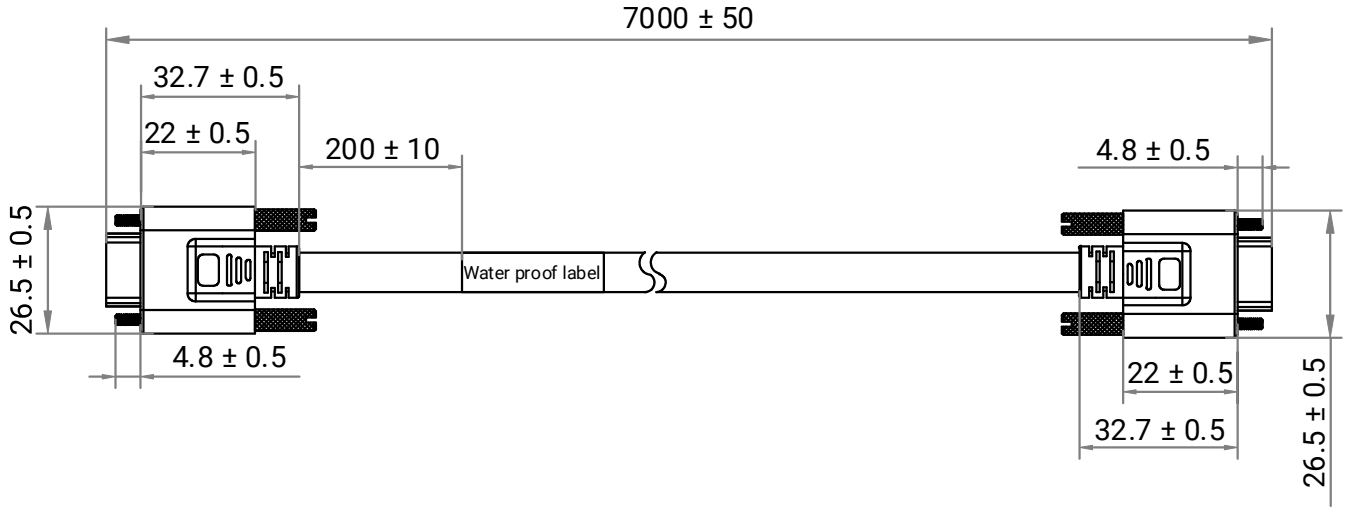

Unit: mm

MV-ACCL-SDR-SDR-HF-10m

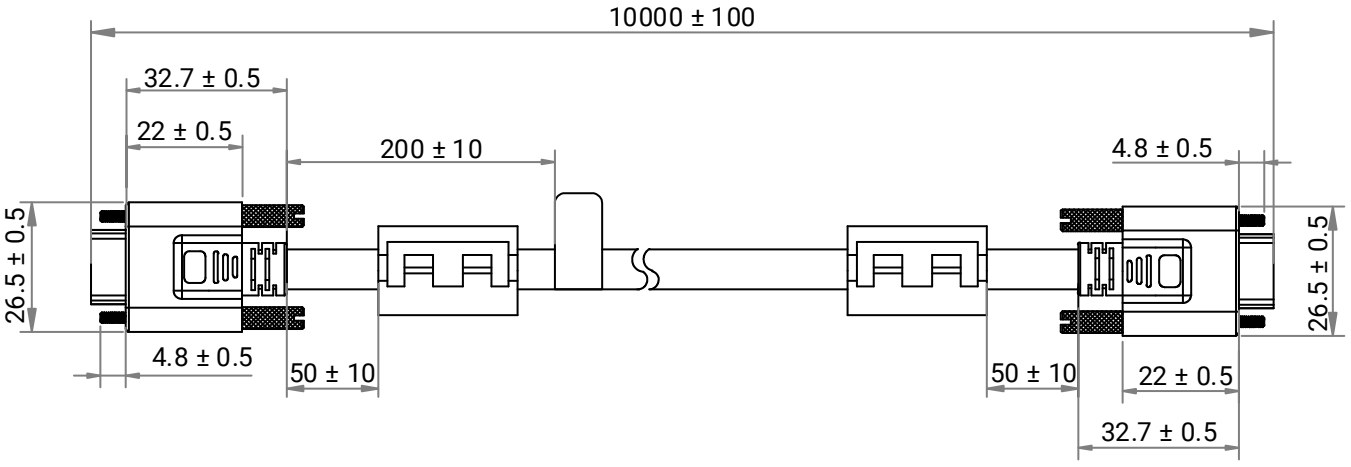

Unit: mm

Specification

Model / Specifications	MV-ACCL-SDR-SDR-HF
	SDR26 High-Flex Data Cable
Physical specification	
End A connector	SDR26
End B connector	SDR26
Cable diameter	9.5 mm
Length	3/5/7/10 m
Cable mechanical	UL20276
Jacket	PVC
Cable color	Black
Connector model	Made in China
Connector durability	≥ 500 mating cycles
Min. bending radius	114 mm
Applicable scenario	Drag chain
Max. U-type bending cycles	5 million
Electrical specification	
Max. voltage	30 VDC
Additional information	
Working temperature	–20 °C to 80 °C (–4 °F to 176 °F)
Certification	UL
Packaging	Individual package

Note: Read the camera user manual before connecting the cable to the camera.

Hangzhou Hikrobot Co. Ltd.
en.hikrobotics.com

© Hangzhou Hikrobot Co., Ltd. All Rights Reserved.
Hangzhou Hikrobot does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.