MV-ACXP6-DIN(up)-DIN-HF-*m

CXP-6 High-Flex Data Cable

The CXP-6 high-flex data cable can be used for data transmission of cameras with CoaXPress interface, and is available in a variety of lengths.




Applicable Product

Hikrobot industrial camera with CoaXPress interface.

Available Model

- 1.5 m length: MV-ACXP6-DIN(up)-DIN-HF-1.5m
- 3 m length: MV-ACXP6-DIN(up)-DIN-HF-3m
- 5 m length: MV-ACXP6-DIN(up)-DIN-HF-5m
- 8 m length: MV-ACXP6-DIN(up)-DIN-HF-8m

Dimension

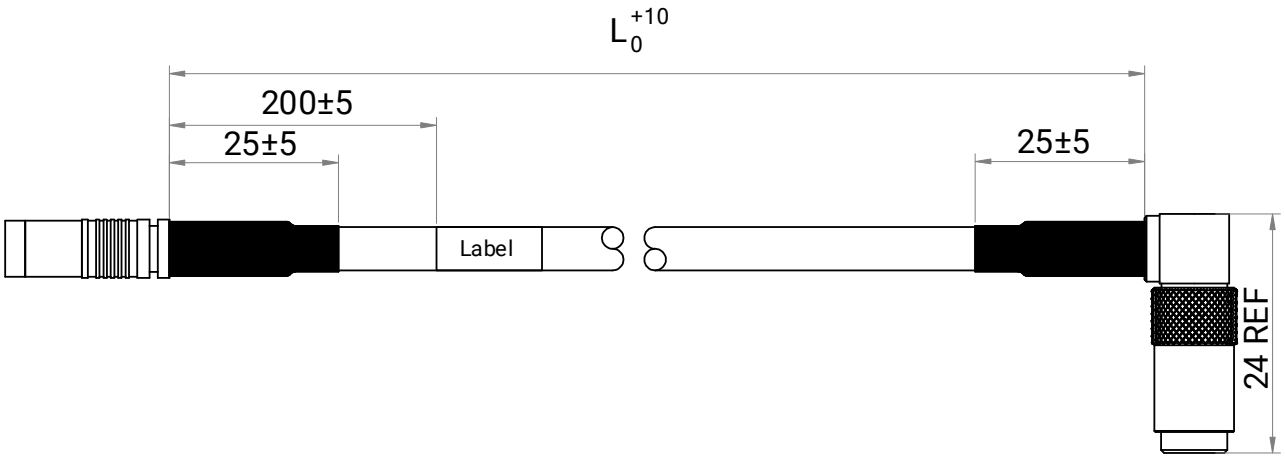

Unit: mm

Specification

Parameter \ Model	MV-ACXP6-DIN(up)-DIN-HF-*m
	CXP-6 High-Flex Data Cable
Physical specification	
End A connector	DIN 1.0/2.3
End B connector	DIN 1.0/2.3 (angled)
Cable diameter	5 mm
Length	1.5 m/3 m/5 m/8 m
Cable mechanical	Coaxial
Jacket	PVC
Cable color	Black
Connector durability	500 mating cycles
Min. bending radius	60 mm
Applicable scenario	Drag chain
Max. U-type bending cycles	2 million times
Electrical specification	
Max. voltage	300 VDC
Additional information	
Working temperature	–30 °C to 80 °C (–22 °F to 176 °F)
Certification	RoHS, UL
Packaging	Individual package

Note: Read the camera user manual before connecting the cable to the camera.

© Hangzhou Hikrobot Co., Ltd. All Rights Reserved.
Hangzhou Hikrobot does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.