HIKROBOT

MV-CH330-60GM/GC

33 MP GigE Area Scan Camera

MV-CH330-60GM/GC camera adopts stacked BSI sensor to provide high-quality images. It uses GigE interface to transmit non-compressed images in real time, and its max. frame rate can reach 3.6 fps in full resolution.



GENICAM GIGE VISION

Key Features

- Resolution of 6664 × 5008, and pixel size of 2.7 μm × 2.7 μm.
- Adopts GigE interface to transmit non-compressed images in real time.
- Easy and flexible installation, with mounting holes on both panels of the camera.
- Compatible with GigE Vision V2.0 Protocol, GenICam Standard, and third-party software based on the protocol and standard.

Typical Application

- SMT/ PCB AOI
- FPD
- Railway applications


Available Model

- Mono camera: MV-CH330-60GM
- Color camera: MV-CH330-60GC


Specification

Model	MV-CH330-60GM	MV-CH330-60GC
Performance		
Sensor type	CMOS, global shutter	
Sensor model	Stacked BSI	
Pixel size	2.7 μm × 2.7 μm	
Sensor size	18 mm × 13.5 mm	
Resolution	6664 × 5008	
Max. frame rate	3.6 fps @ 6664 × 5008 Mono 8	3.6 fps @ 6664 × 5008 Bayer BG 8
Dynamic range	63.4 dB	63.6 dB
SNR	38 dB	
Gain	0 dB to 14 dB	
Exposure time	92 μs to 10 sec	
Exposure mode	Off/Once/Continuous exposure mode, supports TriggerWidth	
Mono/color	Mono	Color
Pixel format	Mono 8/10/10Packed/12/12Packed	Mono 8/10/12 Bayer BG 8/10/10Packed/12/12Packed YUV422Packed, YUV422_8_YUYV RGB 8, BGR 8
Binning	Supports 1 × 1, 2 × 2, 4 × 4	
Decimation	Supports 1 × 1, 2 × 2, 4 × 4	
Reverse image	Supports horizontal and vertical reverse image output	
Electrical feature		
Data interface	Gigabit Ethernet (1000 Mbit/s), compatible with Fast Ethernet (100 Mbit/s)	
Digital I/O	6-pin P7 connector provides power and I/O, including opto-isolated input × 1 (Line 0), opto-isolated output × 1 (Line 1), bi-directional non-isolated I/O × 1 (Line 2).	
Power supply	9 VDC to 24 VDC, supports PoE	
Power consumption	Typ. 3.7 W @ 12 VDC	
Mechanical		
Lens mount	C-mount	
Dimension	29 mm × 44 mm × 59 mm (1.1" × 1.7" × 2.3")	
Weight	Approx. 96 g (0.2 lb.)	
Ingress protection	IP40 (under proper lens installation and wiring)	
Temperature	Working temperature: 0 °C to 50 °C (32 °F to 122 °F) Storage temperature: –30 °C to 80 °C (–22 °F to 176 °F)	
Humidity	20% RH to 95% RH (no condensation)	
General		
Client software	MVS or third-party software meeting with GigE Vision Protocol	
Operating system	32/64-bit Windows 7/10, 64-bit Windows 11, and Linux	
Compatibility	GigE Vision V2.0, GenICam	
Certification	CE, RoHS, KC	

Sensor Quantum Efficiency

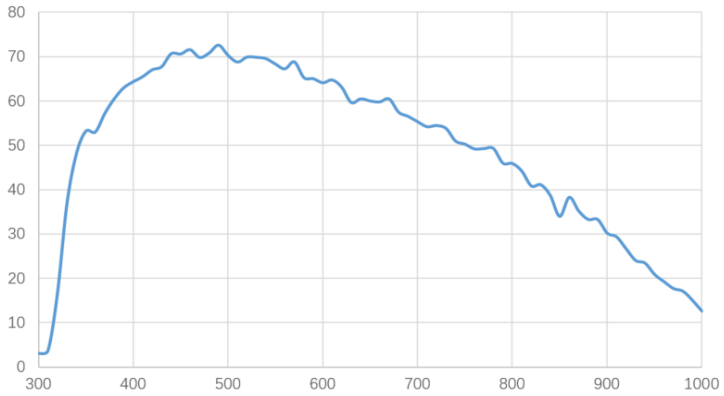


MV-CH330-60GM

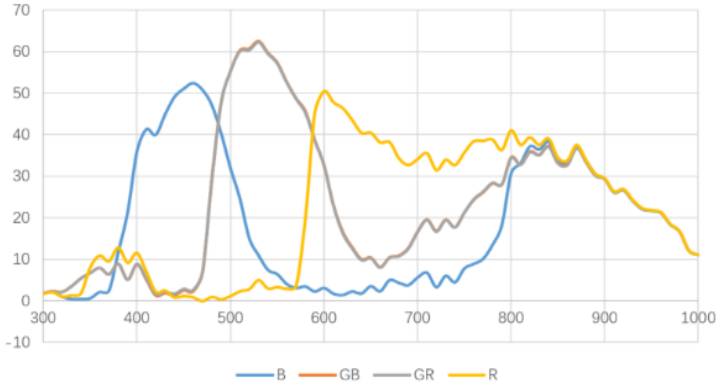

MV-CH330-60GC

Dimension

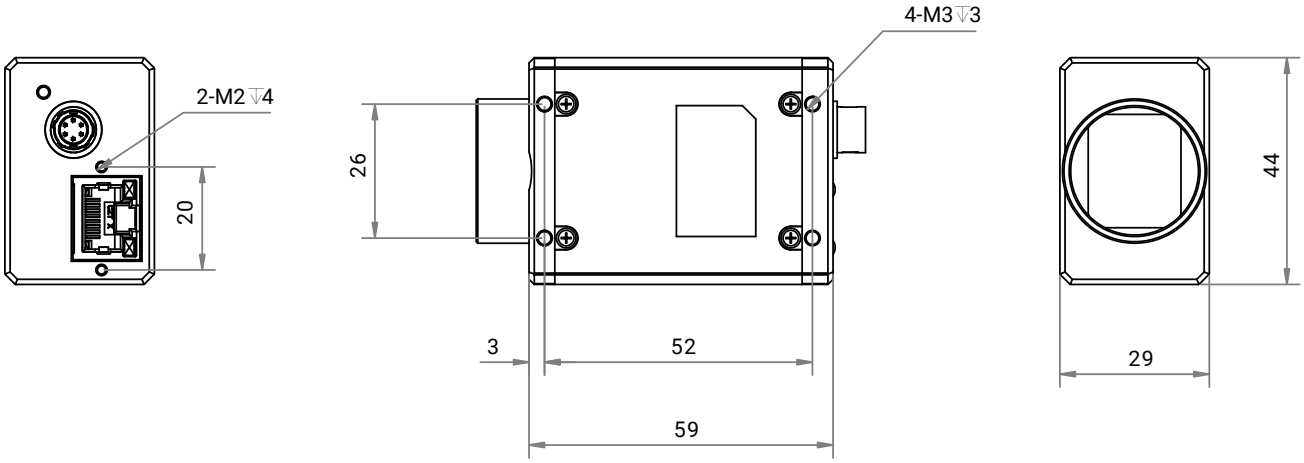

Unit: mm

© Hangzhou Hikrobot Co., Ltd. All Rights Reserved.
Hangzhou Hikrobot does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.