MV-ACC-mFM-mFM-ST

Mini-FAKRA Standard Coaxial Data Cable

The Mini-FAKRA Standard Coaxial Data Cable can be used for data transmission of XoCLink Area Scan Cameras, and is available in a variety of lengths.




Applicable Product

Hikrobot CT Series XoCLink Area Scan Cameras

Available Model

- 1 m length: MV-ACC-mFM-mFM-ST-1m
- 3 m length: MV-ACC-mFM-mFM-ST-3m
- 5 m length: MV-ACC-mFM-mFM-ST-5m
- 7 m length: MV-ACC-mFM-mFM-ST-7m
- 10 m length: MV-ACC-mFM-mFM-ST-10m
- 15 m length: MV-ACC-mFM-mFM-ST-15m

Dimension

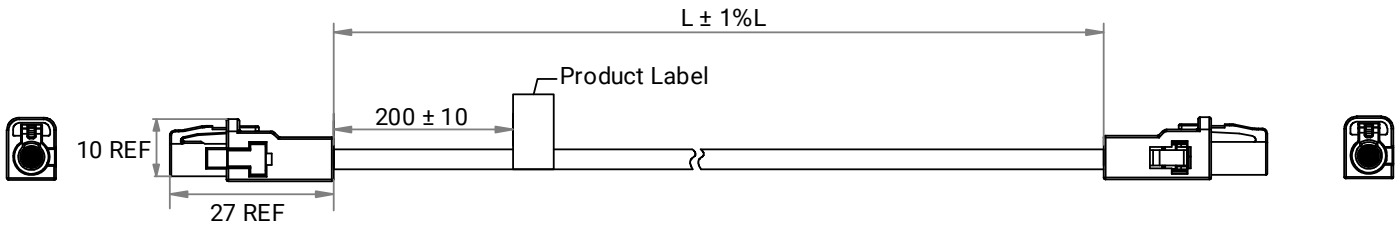

Unit: mm

Specification

Specifications \ Model	MV-ACC-mFM-mFM-ST
	Mini-FAKRA Standard Coaxial Data Cable
Physical specification	
End A connector	Mini-FAKRA, Z-code
End B connector	Mini-FAKRA, Z-code
Cable diameter	1 m, 3 m, and 5 m: 2.8 mm ± 0.2 mm 7 m, 10 m, and 15 m: 3.3 mm ± 0.2 mm
Length	1/3/5/7/10/15 m
Cable mechanical	Coaxial
Jacket	PVC
Cable color	Black
Min. bending radius	1 m, 3 m, and 5 m: 33.6 mm 7 m, 10 m, and 15 m: 39.6 mm
Applicable scenario	Static scenes
Electrical specification	
Max. voltage	60 VDC
Additional information	
Working temperature	–20 °C to 80 °C (–4 °F to 176 °F)
Certification	RoHS
Packaging	Individual package

Note: Read the camera user manual before connecting the cable to the camera.

© Hangzhou Hikrobot Co., Ltd. All Rights Reserved.
Hangzhou Hikrobot does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.